

产品说明:

- 。薄型气缸本体设计使用于位置较高的加工件
- 。标准转角缸结构设计,使用寿命高于市面上的薄型气缸改装结构
- 。相同直径的缸提供两种行程选择
- 。四种活塞直径: 25, 32, 40, 50
- 。内附磁性环,可使用近接开关于外部做感应
- 。复动作形式
- 。焊接专用型



材质说明:

- 。本体及压板使用高级铝合金,及表面硬化处理
- 。活塞及杆采用钢材电镀研磨

订购范例:

PNS	-	25X10	R	-	S1
机种		活塞φx行程	旋转方向		感应器数量
		25X10 32 20 40 50 50	R: Right L: Left		S1:1个 S2:2个 空白: 不要

特性资料:

规格型号	PNS25X10	PNS25X20	PNS32X10	PNS32X20	PNS40X10	PNS40X20	PNS50X20	PNS50X50
活塞	25	25	32	32	40	40	50	50
旋转行程	9.5	9.5	15	15	15	15	19	19
夹紧行程	10	20	10	20	10	20	20	50
理论夹力 at 87psi (6 bar)	Lb	45	45	73	73	143	143	223
	N	200	200	325	325	636	636	992
使用流体	已过滤的压缩空气							
转角度数	90°±3°							
作动形式	复动							
重量	Lb	0.72	0.82	1.18	1.34	1.50	1.50	2.55
	g	326	374	537	608	680	680	1160

单位: mm


治具型空压转角缸

PNS 系列

Jig Pneumatic Swing Clamping Cylinder

最大使用压力 7kg/cm²

PNS

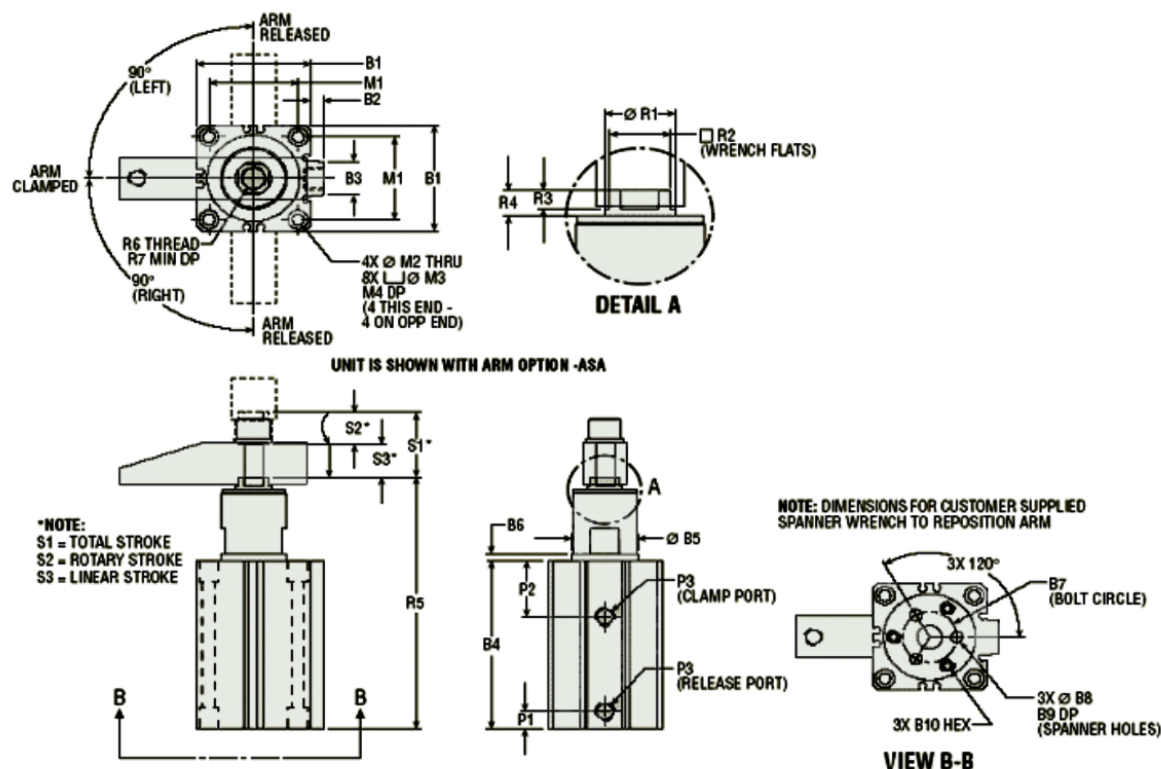

规格型号	PNS 25X10	PNS 25X20	PNS 32X10	PNS 32X20	PNS 40X10	PNS 40X20	PNS 50X20	PNS 50X50
B1	40.0	40.0	45.0	45.0	52.0	52.0	64.0	64.0
B2	5.0	5.0	4.5	4.5	5.0	5.0	7.0	7.0
B3	9.6	9.6	16.5	16.5	18.0	18.0	20.0	20.0
B4	73.0	83.0	80.0	90.0	80.0	90.0	101.5	131.5
B5 Max.	23.0	23.0	30.0	30.0	30.0	30.0	37.0	37.0
B5 Min.	22.948	22.948	29.938	29.938	29.938	29.938	36.938	36.938
B6	3.0	3.0	3.0	3.0	3.0	3.0	3.5	3.5
B7	16.0	16.0	22.0	22.0	30.5	30.5	30.5	30.5
B8	5.3	5.3	5.3	5.3	6.8	6.8	6.8	6.8
B9	6.0	6.0	8.0	8.0	6.0	6.0	6.0	6.0
B10	3.0	3.0	3.0	3.0	4.0	4.0	4.0	4.0
M1	28.0	28.0	34.0	34.0	40.0	40.0	50.0	50.0
M2	5.5	5.5	5.5	5.5	5.5	5.5	6.6	6.6
M3	9.0	9.0	9.0	9.0	9.0	9.0	11.0	11.0
M4	7.0	7.0	9.0	9.0	12.0	12.0	13.0	13.0
P1	6.5	6.5	9.0	9.0	9.0	9.0	11.0	11.0
P2	27.0	27.0	34.5	34.5	34.5	34.5	39.0	39.0
P3	M5	M5	G1/8	G1/8	G1/8	G1/8	G1/4	G1/4
R1	12.0	12.0	16.0	16.0	16.0	16.0	20.0	20.0
R2 Max.	9.9	9.9	13.9	13.9	13.9	13.9	16.9	16.9
R2 Min.	9.8	9.8	13.8	13.8	13.8	13.8	16.8	16.8
R3	3.0	3.0	5.5	5.5	5.5	5.5	5.5	5.5
R4	4.0	4.0	6.5	6.5	6.5	6.5	7.5	7.5
R5	93.5	113.5	113.5	133.5	114.5	134.5	152.0	212.0
R6	M8x1.25	M8x1.25	M10x1.5	M10x1.5	M10x1.5	M10x1.5	M12x1.75	M12x1.75
R7	15.0	15.0	12.0	12.0	12.0	12.0	15.0	15.0
S1 *Min.	19.5	29.5	25.0	35.0	25.0	35.0	39.0	69.0
S2 *	9.5	9.5	15.0	15.0	15.0	15.0	19.0	19.0
S3 *	10.0	20.0	10.0	20.0	10.0	20.0	20.0	50.0

单位: mm