


SH(シャンク)

●各種テーパ規格


BT 寸法表

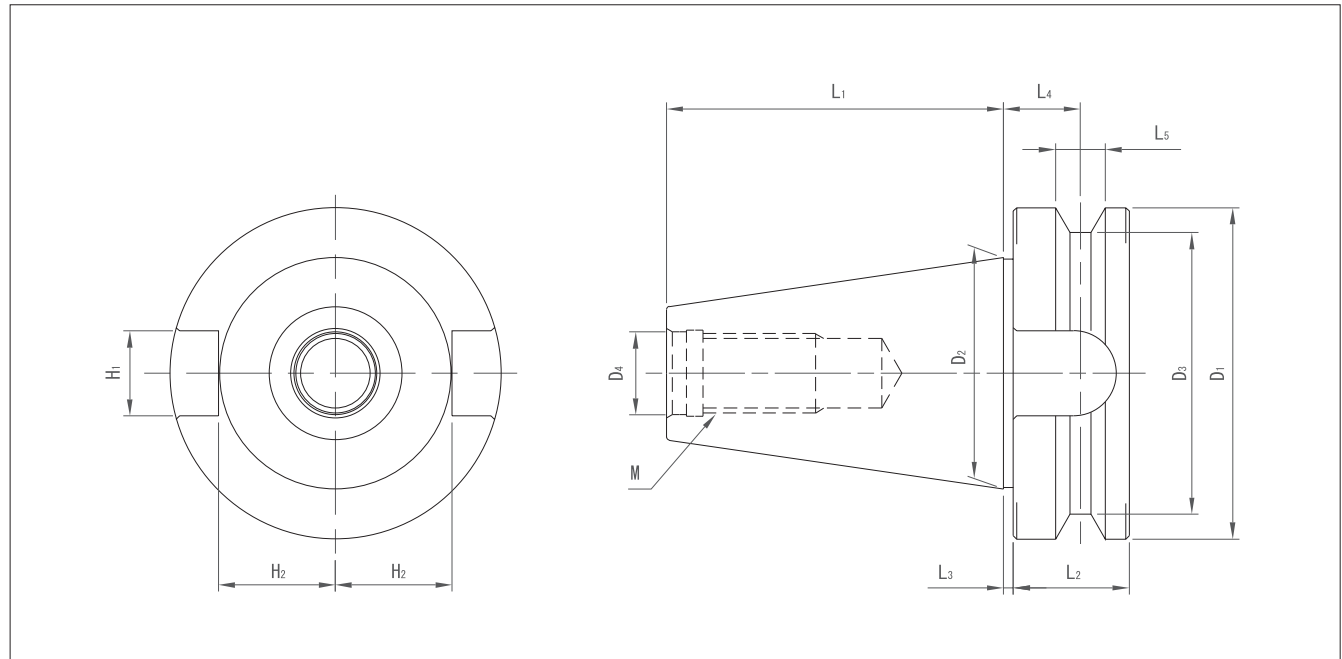

(単位：mm)

| BT No. | D <sub>1</sub> | D <sub>2</sub> | D <sub>3</sub> | D <sub>4</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | L <sub>5</sub> | H <sub>1</sub> | H <sub>2</sub> | M   |
|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----|
| BT30   | 46             | 31.75          | 38             | 12.5           | 48.4           | 20             | 2              | 13.6           | 8              | 16.1           | 16.3           | M12 |
| BT40   | 63             | 44.45          | 53             | 17             | 65.4           | 25             |                | 16.6           | 10             |                | 22.6           | M16 |
| BT50   | 100            | 69.85          | 85             | 25             | 101.8          | 35             | 3              | 23.2           | 15             | 25.7           | 35.4           | M24 |
| BT60   | 155            | 107.95         | 135            | 31             | 161.8          | 45             |                | 28.2           | 20             |                | 60.1           | M30 |

NT 寸法表

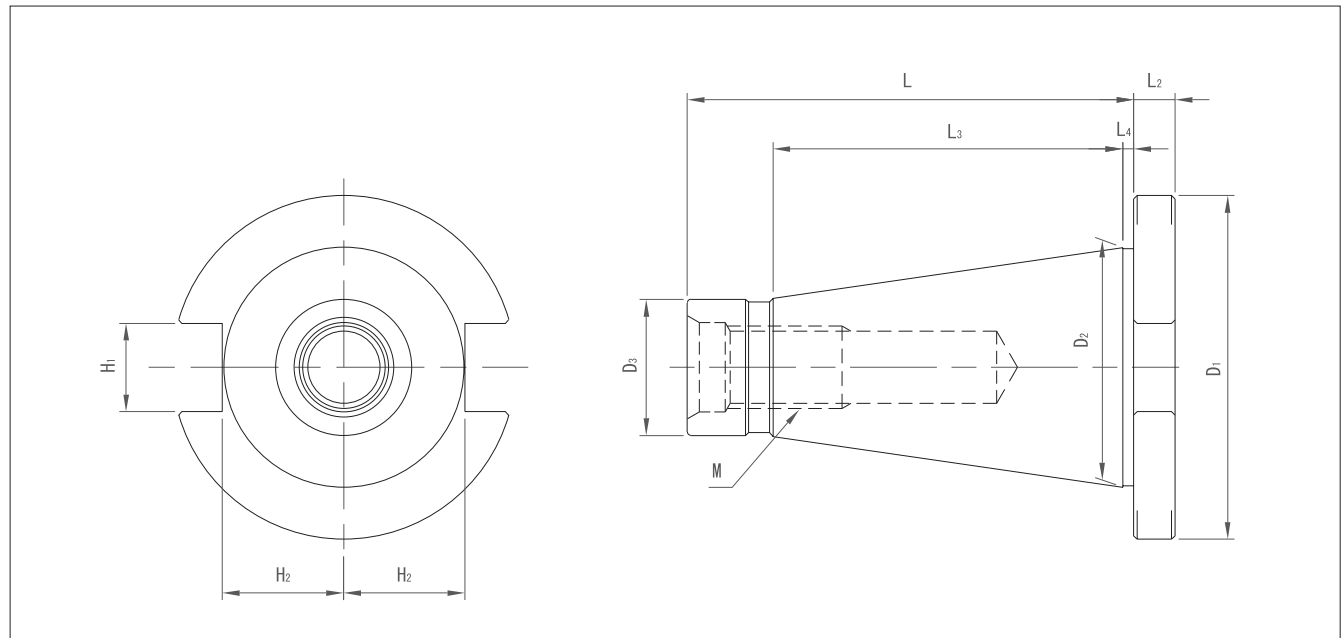


(単位：mm)

| BT No. | D <sub>1</sub> | D <sub>2</sub> | D <sub>3</sub> | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub> | H <sub>1</sub> | H <sub>2</sub> | M    |            |         |
|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------|------------|---------|
|        |                |                |                |                |                |                |                |                |                | メートル | ユニファイ      | ウィット    |
| NT30   | 46             | 31.75          | 17.4           | 68.4           | 10             | 48.4           | 1.6            | 16.1           | 16.2           | M12  | 1/2-13UNC  | W1/2    |
| NT40   | 63             | 44.45          | 25.3           | 93.4           |                | 65.4           |                |                | 22.5           | M16  | 5/8-11UNC  | W5/8    |
| NT50   | 100            | 69.85          | 39.6           | 126.8          | 12             | 101.8          | 3.2            | 25.7           | 35.3           | M24  | 1'-8UNC    | W1'     |
| NT60   | 155            | 107.95         | 60.2           | 206.8          | 15             | 161.8          |                |                | 60             | M30  | 1 1/4-7UNC | W1' 1/4 |

SH(シャンク)


MT 寸法表 ( タング式 )

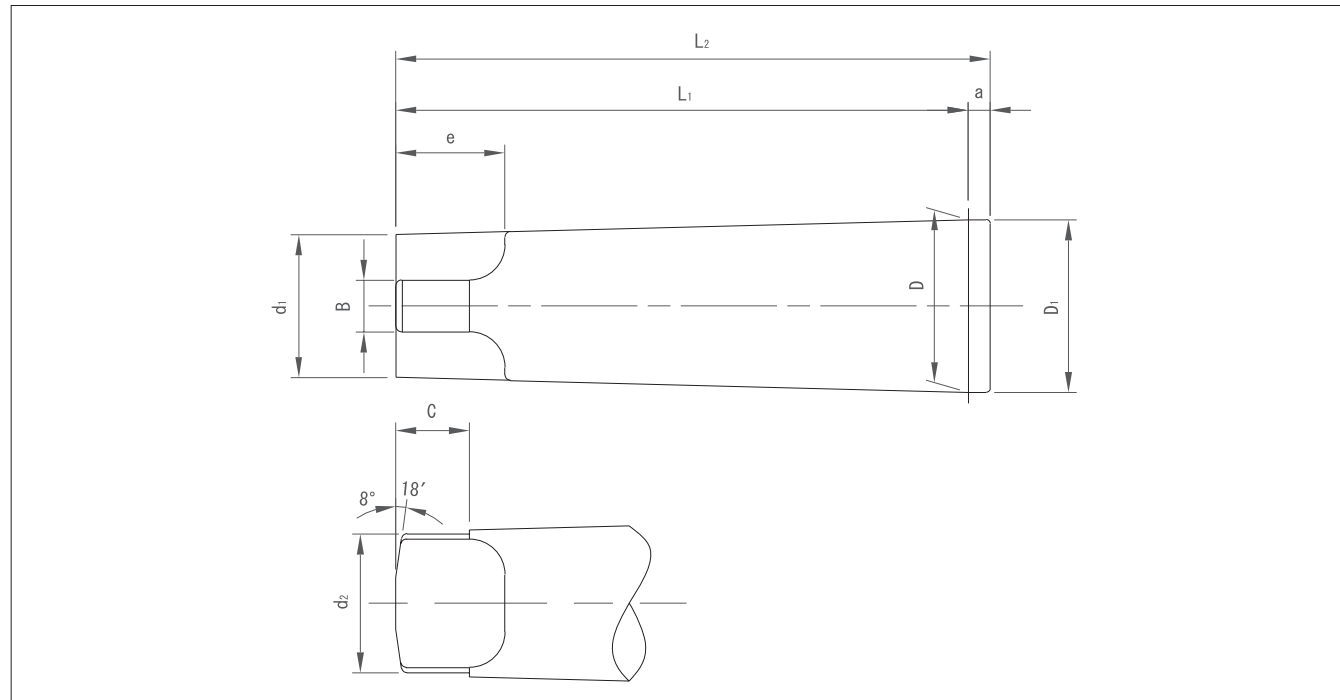

(単位：mm)

| MT No. | D      | a   | D <sub>1</sub> | d <sub>1</sub> | d <sub>2</sub><br>(最大) | L <sub>1</sub><br>(最大) | L <sub>2</sub><br>(最大) | B    | C  | e<br>(最大) | R<br>(最大) | r   |
|--------|--------|-----|----------------|----------------|------------------------|------------------------|------------------------|------|----|-----------|-----------|-----|
| MT2    | 17.780 | 5   | 18.0           | 14.0           | 13.5                   | 75.0                   | 80                     | 6.3  | 10 | 16        | 6         | 1.6 |
| MT3    | 23.825 |     | 24.1           | 19.1           | 18.5                   | 94.0                   | 99                     | 7.9  | 13 | 20        | 7         | 2   |
| MT4    | 31.267 | 6.5 | 31.6           | 25.2           | 24.5                   | 117.5                  | 124                    | 11.9 | 16 | 24        | 8         | 2.5 |
| MT5    | 44.399 |     | 44.7           | 36.5           | 35.7                   | 149.5                  | 156                    | 15.9 | 19 | 29        | 10        | 3   |
| MT6    | 63.348 | 8   | 63.8           | 52.4           | 51.0                   | 210.0                  | 218                    | 19   | 27 | 40        | 13        | 4   |

HSK 寸法表

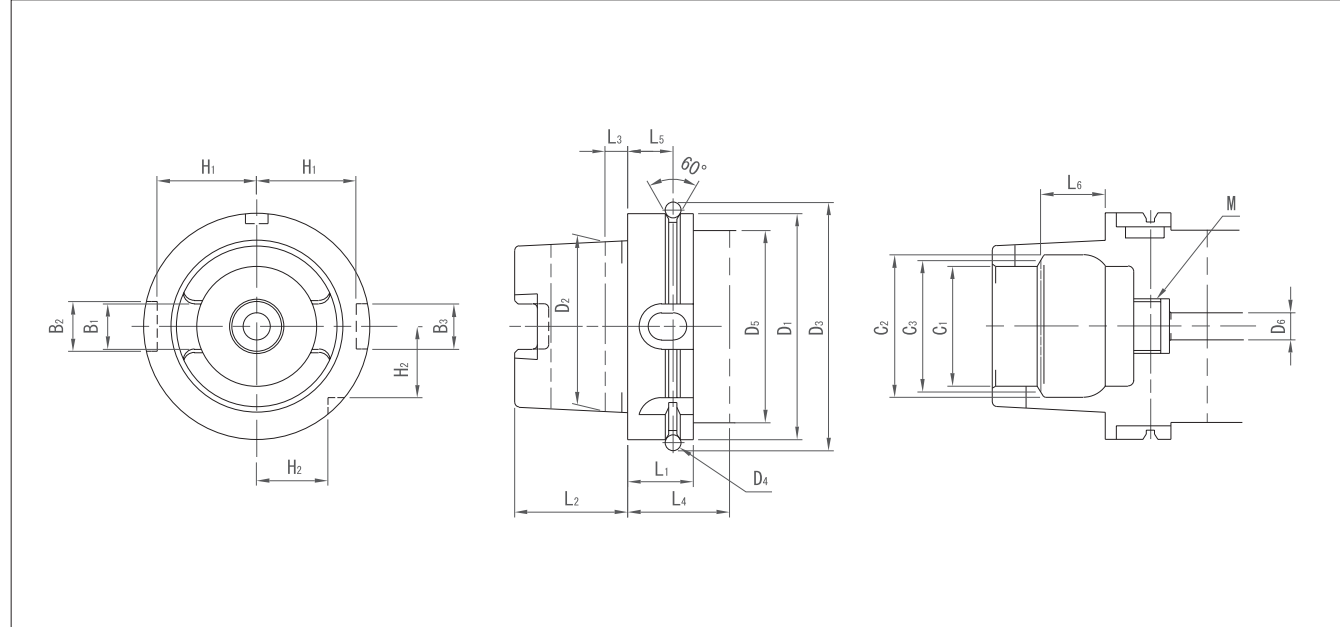

(単位：mm)





| HSK No. | D <sub>1</sub> | D <sub>2</sub> | D <sub>3</sub> | D <sub>4</sub> | D <sub>5</sub><br>(最大) | D <sub>6</sub><br>(最大) | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> | L <sub>4</sub><br>(最小) | L <sub>5</sub> | L <sub>6</sub> |
|---------|----------------|----------------|----------------|----------------|------------------------|------------------------|----------------|----------------|----------------|------------------------|----------------|----------------|
| HSK-A63 | 63             | 48             | 72.3           | 7              | 53                     | 8.4                    | 32             | 26             | 6.3            | 42                     | 18             | 18.13          |

| HSK No. | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | B <sub>1</sub> | B <sub>2</sub> | B <sub>3</sub> | H <sub>1</sub> | H <sub>2</sub> | M         |
|---------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------|
| HSK-A63 | 34             | 40             | 37             | 12.54          | 18             | 16             | 26.5           | 20             | M18 × 1.0 |



SH(シャンク)

BT シャンク互換表

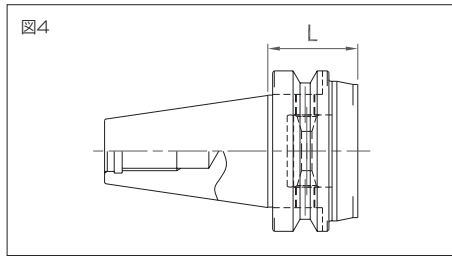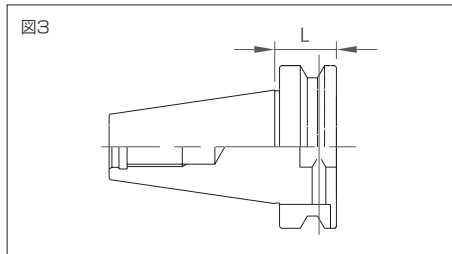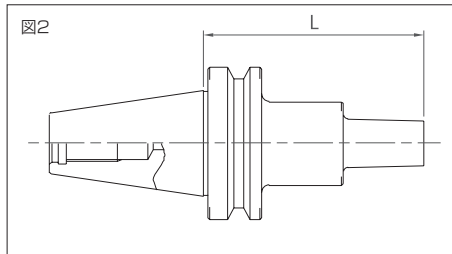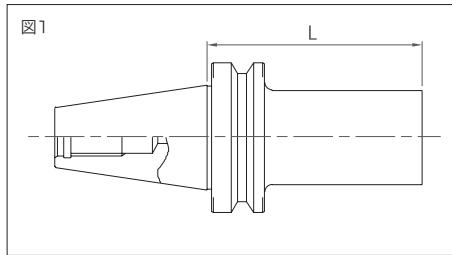


- 1. \* 印のついた本体に接続する場合には中継フランジが必要です。
- 2. オートマッチリセッシングヘッド (RH) 用のシャンクをご用命の場合は別途お問い合わせください。

| (単位 : mm)       |        |     |                               |   |          |
|-----------------|--------|-----|-------------------------------|---|----------|
| シャンクコード         | BT No. | L   | 適用本体                          | 図 | 重量 kg    |
| BT30-SH 18 - 50 | BT30   | 50  | ABH-SB18,ABH-18               | 1 | 0.5      |
| SH 23 - 55      |        | 55  | ABH-SB23,ABH-23,BCH-28,BCH-33 |   | 0.6      |
| SH 30 - 45      |        | 45  | ABH-SB30,ABH-30,BCH-41        |   | 0.5      |
| SH 40 - 35      |        | 35  | ABH-SB40,ABH-40,ABH-58,BCH-52 |   | 0.5      |
| SH 45 - 22      |        | 22  | PRM45                         |   | 0.3      |
| BT40-SH 18 - 85 | BT40   | 85  | ABH-SB18,ABH-18               | 1 | 1.1      |
| SH 23 - 70      |        | 70  | ABH-SB23,ABH-23,BCH-28,BCH-33 |   | 1.1      |
| 130             |        | 130 | ABH-SB23,ABH-23,BCH-28,BCH-33 |   | 1.8      |
| SH 30 - 85      |        | 85  | ABH-SB30,ABH-30,BCH-41        |   | 1.3      |
| 115             |        | 115 | ABH-SB30,ABH-30,BCH-41        |   | 1.6      |
| SH 40 - 75      |        | 75  | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1 | 1.3      |
| 105             |        | 105 | ABH-SB40,ABH-40,ABH-58,BCH-52 |   | 1.6      |
| SH 45 - 27      |        | 27  | PRM45                         |   | 0.7      |
| SH 50 - 93      |        | 93  | ABH-SB50,ABH-50               |   | 1.8      |
| 123             |        | 123 | ABH-SB50,ABH-50               |   | 2.3      |
| SH 57 - 68      |        | 68  | BCH-67                        | 2 | 1.8      |
| 98              |        | 98  | BCH-67                        | 3 | 2.4      |
| SH 60 - 27      |        | 27  | PRM60                         |   | 0.6      |
| SH 63 - 68      |        | 68  | ABH-63,BCH-90                 |   | 1.7      |
| 98              |        | 98  | ABH-63,BCH-90                 |   | 2.4      |
| SH 63M- 30      |        | 30  | MAG-T63                       | 2 | 0.9      |
| SH 83 - 65      |        | 65  | ABH-83,BCH-120                |   | 1.9      |
| 95              |        | 95  | ABH-83,BCH-120                |   | 2.7      |
| SH125 - 84      |        | 84  | BHB-125                       |   | 2.3      |
| SH180 - 65      |        | 65  | BHB-180,BHB-280               |   | 2.6      |
| BT50-SH 18 -130 | BT50   | 130 | ABH-SB18,ABH-18               | 1 | 4.4      |
| SH 23 -100      |        | 100 | ABH-SB23,ABH-23,BCH-28,BCH-33 |   | 3.8      |
| 160             |        | 160 | ABH-SB23,ABH-23,BCH-28,BCH-33 |   | 4.5      |
| SH 30 - 85      |        | 85  | ABH-SB30,ABH-30,BCH-41        |   | 3.7      |
| 145             |        | 145 | ABH-SB30,ABH-30,BCH-41        |   | 5.4      |
| SH 40 -105      |        | 105 | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1 | 4.0      |
| 165             |        | 165 | ABH-SB40,ABH-40,ABH-58,BCH-52 |   | 4.8      |
| SH 45 - 40      |        | 40  | PRM45                         |   | 3.5      |
| SH 50 -123      |        | 123 | ABH-SB50,ABH-50               |   | 4.6      |
| 183             |        | 183 | ABH-SB50,ABH-50               |   | 5.7      |
| SH 57 - 83      |        | 83  | BCH-67                        | 1 | 5.1      |
| 143             |        | 143 | BCH-67                        |   | 6.6      |
| 188             |        | 188 | BCH-67                        |   | 8.1      |
| SH 60 - 40      |        | 40  | PRM60                         |   | 3.5      |
| SH 63 - 83      |        | 83  | ABH-63,BCH-90                 | 2 | 4.4      |
| 143             |        | 143 | ABH-63,BCH-90                 |   | 5.7      |
| 203             |        | 203 | ABH-63,BCH-90                 |   | 7.1      |
| SH 63M- 40      |        | 40  | MAG-T63                       |   | 3.4      |
| SH 83 - 95      |        | 95  | ABH-83,BCH-120                |   | 5.1      |
| 140             |        | 140 | ABH-83,BCH-120                | 2 | 6.5      |
| 185             |        | 185 | ABH-83,BCH-120                |   | 8.0      |
| SH 83M- 56      |        | 56  | MAG-T83                       |   | 4.4      |
| SH160 - 90      |        | 90  | BCH-160,BCH-220               |   | 7.3      |
| 150             |        | 150 | BCH-160,BCH-220               | 2 | 9.3      |
| SH180 - 80      |        | 80  | BHB-125*,BHB-180,BHB-280      |   | 5.3      |
| 140             |        | 140 | BHB-125*,BHB-180,BHB-280      |   | 8.8      |
| SH180T- 90      |        | 90  | BTA                           |   | 8.0      |
| 150             |        | 150 | BTA                           |   | 11.0     |
| SH300 - 67      |        | 67  | M-BCH                         | 2 | 5.9      |
| SH320 -100      |        | 100 | BTM                           |   | 7.5      |
| BT60-SH300 - 67 | BT60   | 67  | M-BCH                         |   | 15.1     |
| SH320 - 56      |        | 56  | BTM*                          | 2 | 14.6+5.1 |



SH(シャンク)

NT シャンク互換表

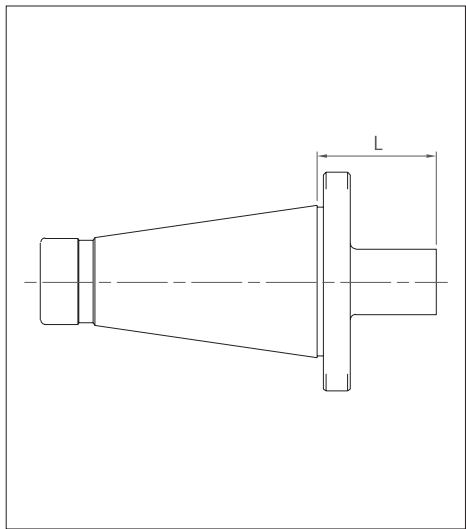

| (単位 : mm)       |        |      |                               |       |  |
|-----------------|--------|------|-------------------------------|-------|--|
| シャンクコード         | NT No. | L    | 適用本体                          | 重量 kg |  |
| NT40%-SH 18- 25 | NT40   | 25   | ABH-SB18,ABH-18               | 0.9   |  |
| SH 18- 65       |        | 65   | ABH-SB18,ABH-18               | 1.0   |  |
| SH 23- 50       |        | 50   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.9   |  |
| 90              |        | 90   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 1.1   |  |
| SH 30- 55       |        | 55   | ABH-SB30,ABH-30,BCH-41        | 1.0   |  |
| 95              |        | 95   | ABH-SB30,ABH-30,BCH-41        | 1.2   |  |
| SH 40- 45       |        | 45   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1.1   |  |
| 85              |        | 85   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1.4   |  |
| SH 45- 20       |        | 20   | PRM45                         | 0.7   |  |
| SH 50- 93       |        | 93   | ABH-SB50,ABH-50               | 1.9   |  |
| 143             |        | 143  | ABH-SB50,ABH-50               | 2.7   |  |
| SH 57- 68       |        | 68   | BCH-67                        | 1.6   |  |
| 118             |        | 118  | BCH-67                        | 2.6   |  |
| SH 60- 25       |        | 25   | PRM60                         | 0.6   |  |
| SH 63- 68       |        | 68   | ABH-63,BCH-90                 | 1.9   |  |
| 118             |        | 118  | ABH-63,BCH-90                 | 3.1   |  |
| SH 83- 65       | NT50   | 65   | ABH-83,BCH-120                | 2.2   |  |
| 115             |        | 115  | ABH-83,BCH-120                | 3.4   |  |
| SH125- 27.5     |        | 27.5 | BHB125                        | 1.5   |  |
| SH160- 18.6     |        | 18.6 | BCH-160,BCH-220               | 1.6   |  |
| SH180- 35       |        | 35   | BHB180,BHB280                 | 2.3   |  |
| NT50%-SH 18- 25 |        | 25   | ABH-SB18,ABH-18               | 2.6   |  |
| 65              |        | 65   | ABH-SB18,ABH-18               | 2.8   |  |
| SH 23- 50       |        | 50   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 2.8   |  |
| 90              |        | 90   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 2.9   |  |
| SH 30- 55       |        | 55   | ABH-SB30,ABH-30,BCH-41        | 2.8   |  |
| 95              |        | 95   | ABH-SB30,ABH-30,BCH-41        | 3.1   |  |
| SH 40- 85       |        | 85   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 3.3   |  |
| 125             |        | 125  | ABH-SB40,ABH-40,ABH-58,BCH-52 | 3.7   |  |
| SH 50- 78       |        | 78   | ABH-SB50,ABH-50               | 3.5   |  |
| 128             |        | 128  | ABH-SB50,ABH-50               | 4.3   |  |
| 178             |        | 178  | ABH-SB50,ABH-50               | 5.1   |  |
| SH 60- 25       | NT60   | 25   | PRM60                         | 2.8   |  |
| SH 57- 118      |        | 118  | BCH-67                        | 4.7   |  |
| 168             |        | 168  | BCH-67                        | 5.8   |  |
| 218             |        | 218  | BCH-67                        | 6.8   |  |
| SH 63- 118      |        | 118  | ABH-63,BCH-90                 | 5     |  |
| 168             |        | 168  | ABH-63,BCH-90                 | 6.3   |  |
| 218             |        | 218  | ABH-63,BCH-90                 | 7.3   |  |
| SH 83- 115      |        | 115  | ABH-83,BCH-120                | 5.8   |  |
| 165             |        | 165  | ABH-83,BCH-120                | 7.5   |  |
| 215             |        | 215  | ABH-83,BCH-120                | 9.2   |  |
| SH160- 20.2     |        | 20.2 | BCH-160,BCH-220               | 3     |  |
| SH180- 20.2     |        | 20.2 | BHB125*,BHB180,BHB280         | 3     |  |
| SH300- 42       |        | 42   | M-BCH                         | 4.9   |  |
| SH320- 45       |        | 45   | BTM                           | 5.4   |  |
| NT60%-SH300- 42 |        | 42   | M-BCH                         | 12.6  |  |
| SH320- 23       |        | 23   | BTM*                          | 14.3  |  |

- 1. \* 印のついた本体に接続する場合には中継フランジが必要です。




SH(シャンク)

MT シャンク互換表

(単位：mm)

| シャンクコード       | MT No. | L    | 適用本体                          | 重量 kg |
|---------------|--------|------|-------------------------------|-------|
| MT2-SH 18- 50 | MT2    | 50   | ABH-SB18,ABH-18               | 0.2   |
| SH 23- 35     |        | 35   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.2   |
| SH 30- 40     |        | 40   | ABH-SB30,ABH-30,BCH-41        | 0.3   |
| MT3-SH 18- 50 | MT3    | 50   | ABH-SB18,ABH-18               | 0.4   |
| SH 23- 55     |        | 55   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.4   |
| SH 30- 40     |        | 40   | ABH-SB30,ABH-30,BCH-41        | 0.4   |
| SH 40- 30     |        | 30   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 0.4   |
| MT4-SH 18- 50 | MT4    | 50   | ABH-SB18,ABH-18               | 0.7   |
| SH 23- 55     |        | 55   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.7   |
| SH 30- 60     |        | 60   | ABH-SB30,ABH-30,BCH-41        | 0.8   |
| SH 40- 50     |        | 50   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 0.5   |
| SH 50- 68     |        | 68   | ABH-SB50,ABH-50               | 1.2   |
| SH 57- 53     |        | 53   | BCH-67                        | 1.3   |
| SH 63- 53     |        | 53   | ABH-63,BCH-90                 | 1.6   |
| SH108- 23.5   |        | 23.5 | BHB125                        |       |
| MT5-SH 18- 50 | MT5    | 50   | ABH-SB18,ABH-18               | 1.6   |
| SH 23- 75     |        | 75   | ABH-SB23,ABH-23,BCH-28,BCH-33 | 1.7   |
| SH 30- 80     |        | 80   | ABH-SB30,ABH-30,BCH-41        | 1.8   |
| SH 40- 70     |        | 70   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 2.1   |
| 110           |        | 110  |                               | 2.5   |
| SH 50- 78     |        | 78   | ABH-SB50,ABH-50               | 2.3   |
| 128           |        | 128  |                               | 3.1   |
| SH 57- 53     |        | 53   | BCH-67                        | 2     |
| 103           |        | 103  |                               | 3.1   |
| SH 63- 53     |        | 53   | ABH-63,BCH-90                 | 2.4   |
| 103           |        | 103  |                               | 3.6   |
| SH 83- 50     |        | 50   | ABH-83,BCH-120                | 2.8   |
| 100           |        | 100  |                               | 4.3   |
| SH125- 23.5   |        | 23.5 | BHB125                        | 2.1   |
| SH160- 23.5   |        | 23.5 | BCH-160,BCH-220               | 2.6   |
| SH180- 23.5   |        | 23.5 | BHB180,BHB280                 | 2.6   |
| MT6-SH 30- 80 | MT6    | 80   | ABH-SB30,ABH-30,BCH-41        | 4.5   |
| SH 40- 70     |        | 70   | ABH-SB40,ABH-40,ABH-58,BCH-52 | 4.7   |
| 110           |        | 110  |                               | 5.1   |
| SH 50- 78     |        | 78   | ABH-SB50,ABH-50               | 4.9   |
| 128           |        | 128  |                               | 5.7   |
| 178           |        | 178  |                               | 6.5   |
| SH 57- 103    |        | 103  | BCH-67                        | 6.1   |
| 153           |        | 153  |                               | 7.1   |
| SH 63- 53     |        | 53   | ABH-63,BCH-90                 | 5     |
| 103           |        | 103  |                               | 6.2   |
| 153           |        | 153  |                               | 7.4   |
| SH 83- 50     |        | 50   | ABH-83,BCH-120                | 5.4   |
| 100           |        | 100  |                               | 6.7   |
| 150           |        | 150  |                               | 8.1   |
| SH160- 25     |        | 25   | BCH-160,BCH-220               | 5.2   |
| SH180- 25     |        | 25   | BHB125*,BHB180,BHB280         | 5.2   |
| SH300- 26     |        | 26   | M-BCH                         | 6     |
| SH320- 35     |        | 35   | BTM                           | 6.3   |
| MT7-SH300- 28 | MT7    | 28   | M-BCH                         | 11    |
| SH320- 33     |        | 33   | BTM*                          | 16    |

1. \* 印のついた本体に接続する場合には中継フランジが必要です。

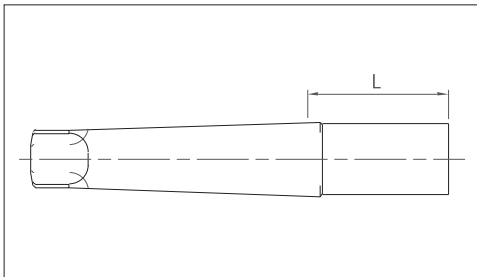

SH(シャンク)




SH(シャンク)

HSK シャンク互換表

(単位：mm)


| シャンクコード       | HSK No. | L   | 適用本体                          | 重量 kg |
|---------------|---------|-----|-------------------------------|-------|
| A63-SH 18- 85 | A63     | 85  | ABH-SB18,ABH-18               | 1     |
| SH 23- 70     |         | 70  | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.8   |
| 130           |         | 130 |                               | 1.6   |
| SH 30- 85     |         | 85  | ABH-SB30,ABH-30,BCH-41        | 1     |
| 115           |         | 115 |                               | 1.3   |
| SH 40- 45     |         | 75  | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1.1   |
| 105           |         | 105 |                               | 1.3   |
| SH 45- 45     |         | 73  | PRM45                         | 1.3   |
| SH 50- 68     |         | 68  | ABH-SB50,ABH-50               | 1.3   |
| 93            |         | 93  |                               | 1.8   |
| SH 57- 63     |         | 63  | BCH-67                        | 1.1   |
| 93            |         | 93  |                               | 1.7   |
| SH 60- 50     |         | 50  | PRM60                         | 1.7   |

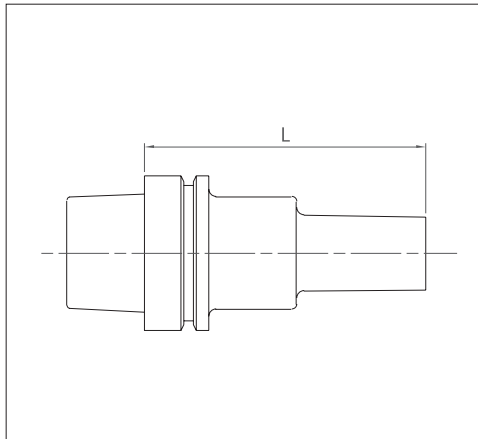

ST シャンク互換表

(単位：mm)

| シャンクコード        | ST No. | L  | 適用本体                          | 重量 kg |
|----------------|--------|----|-------------------------------|-------|
| ST25-SH 18- 30 | ST25   | 30 | ABH-SB18,ABH-18               | 0.3   |
| SH 23- 35      |        | 35 | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.3   |
| SH 30- 40      |        | 40 | ABH-SB30,ABH-30,BCH-41        | 0.4   |
| SH 45- 30      |        | 30 | PRM45                         | 0.5   |
| ST32-SH 18- 50 | ST32   | 50 | ABH-SB18,ABH-18               | 0.6   |
| SH 23- 55      |        | 55 | ABH-SB23,ABH-23,BCH-28,BCH-33 | 0.7   |
| SH 30- 60      |        | 60 | ABH-SB30,ABH-30,BCH-41        | 0.8   |
| SH 40- 50      |        | 50 | ABH-SB40,ABH-40,ABH-58,BCH-52 | 0.9   |
| SH 45- 20      |        | 20 | PRM45                         | 0.7   |
| SH 60- 30      |        | 30 | PRM60                         | 1.1   |
| ST42-SH 18- 50 | ST42   | 50 | ABH-SB18,ABH-18               | 1.1   |
| SH 23- 55      |        | 55 | ABH-SB23,ABH-23,BCH-28,BCH-33 | 1.2   |
| SH 30- 60      |        | 60 | ABH-SB30,ABH-30,BCH-41        | 1.3   |
| SH 40- 50      |        | 50 | ABH-SB40,ABH-40,ABH-58,BCH-52 | 1.4   |
| SH 60- 20      |        | 20 | PRM60                         | 1.4   |

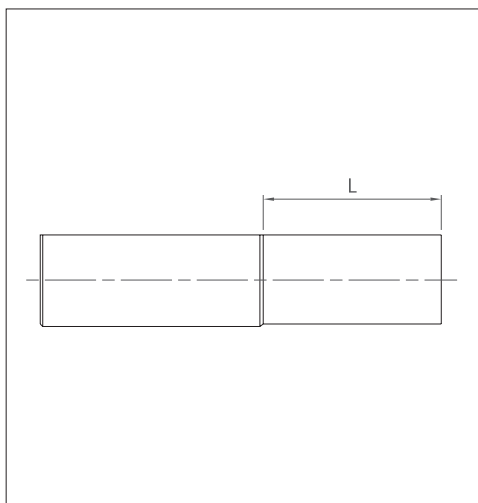


H シャンク互換表

(単位：mm)


| シャンクコード       | H No. | L   | 適用本体                          | 重量 kg |
|---------------|-------|-----|-------------------------------|-------|
| H50-SH 18- 40 | H50   | 40  | ABH-SB18,ABH-18               | 1.9   |
| 80            |       | 80  |                               | 2     |
| SH 23- 65     |       | 65  | ABH-SB23,ABH-23,BCH-28,BCH-33 | 2     |
| 105           |       | 105 |                               | 2.1   |
| SH 30- 70     |       | 70  | ABH-SB30,ABH-30,BCH-41        | 2     |
| 110           |       | 110 |                               | 2.2   |
| SH 40-100     |       | 100 |                               | 2.5   |
| 140           |       | 140 | ABH-63,BCH-90                 | 2.9   |
| SH 50- 78     |       | 78  |                               | 2.7   |
| 128           |       | 128 | ABH-SB50,ABH-50               | 3.5   |
| 178           |       | 178 |                               | 4.3   |
| SH 57- 83     |       | 83  | BCH-67                        | 2.8   |
| 133           |       | 133 |                               | 3.9   |
| 183           |       | 183 |                               | 5     |
| SH 63- 83     |       | 83  |                               | 3     |
| 133           |       | 133 | 98145.451                     | 4.2   |
| 183           |       | 183 |                               | 5.4   |
| SH 83- 80     |       | 80  |                               | 3.2   |
| 130           |       | 130 | ABH-83,BCH-120                | 4.4   |
| 180           |       | 180 |                               | 5.6   |
| SH160- 49     |       | 49  | BCH-160,BCH-220               | 3.1   |
| SH180- 49     |       | 49  | BHB125*,BHB180,BHB260         | 3.1   |

1. \* 印のついた本体に接続する場合には中継フランジが必要です。

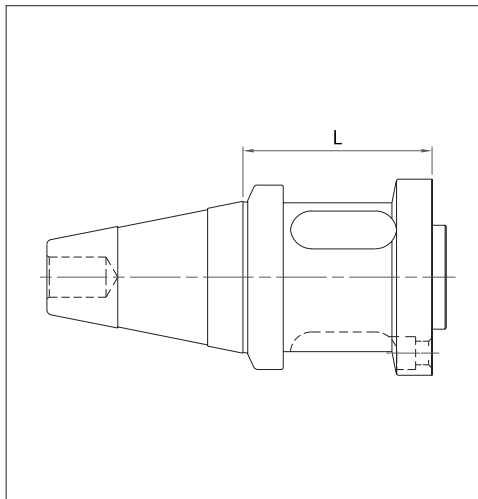

SH(シャンク)

ACCESS 会社所在地

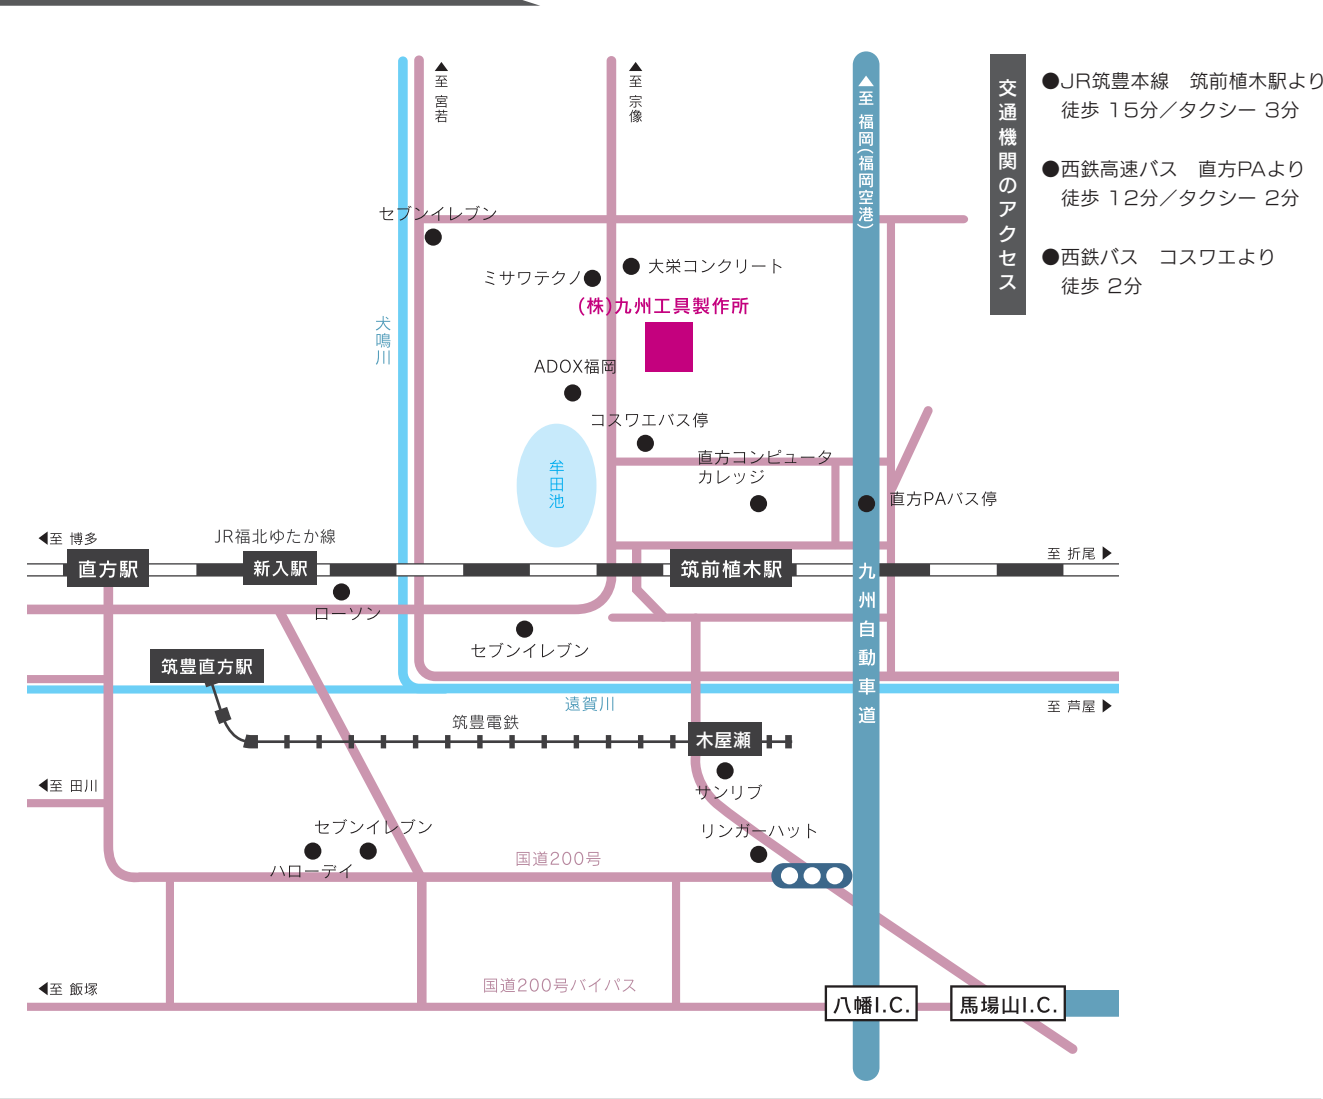

住所:〒822-0031福岡県直方市大字植木 1249-1  
TEL:0949-28-0311(代)  
FAX:0949-24-1611  
URL:<http://www.kyushukogu.co.jp/>  
Mail:[office@kyushukogu.co.jp](mailto:office@kyushukogu.co.jp)

本書に記載した製品の仕様は、予告なしに変更することがあります。