



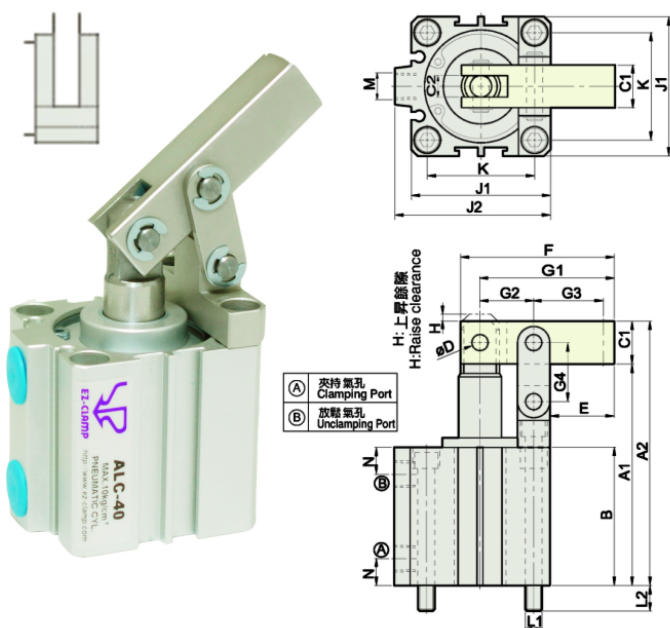

订购范例:

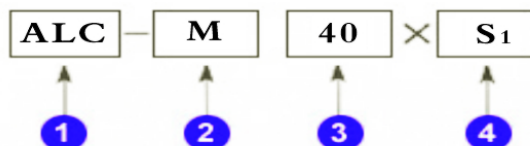

1	系列别	ALC
2	空白	标准型
2	M	附磁石感应
3	气缸内径	φ25 φ32 φ40 φ50 φ63
4	近接开关	S1:1个 S2:2个

规格型号		ALC-25	ALC-32	ALC-40	ALC-50	ALC-63
气缸内径		φ25	φ32	φ40	φ50	φ63
活塞杆径		φ10	φ12	φ16	φ20	φ20
总行程		20	23	25	30	35
受压面积cm ²		4.91	8.04	12.57	19.63	31.17
理论夹持力 6kg/cm ²		15	25	44	71	136
使用流体		已滤清之压缩空气				
最大操作压力		10kg/c m ²				
使用压力范围		1-7kg/c m ²				
作动方式		复动式				
标准型	A1	65.5	78	82.5	96.6	115.5
	A2	78.2	93.9	98.4	115.6	137.7
	B	41	49	51.5	58.6	72.5
感应型 M	A1	75.5	93	97.5	106.6	125.5
	A2	88.2	108.9	113.4	125.6	147.7
	B	51	64	66.5	68.6	82.5
C1		□12.7	□15.9	□15.9	□19	□22.2
C2		6	8	8	10	10
D		φ5	φ6	φ6	φ8	φ8
E		25	31	32	35	38.5
F		50	60	65	75	85
G1		45	54	58	66	76
G2		14	17	20	23	29.5
G3		27.5	33	34	38	40.5
G4		17	20	22	27	32
H		3	3	3	3	3
J1		40	44	52	62	75
J2		—	50	58	71	84.5
K		28	34	40	48	60
L1		M5x0.8	M5x0.8	M6x1.0	M6x1.0	M6x1.0
L2		10.5	11	9.5	11	11
M		M5x0.8	PT1/8	PT1/8	PT1/8	PT1/8
N		8	9	10	11	11
重量(Kg)		0.27	0.42	0.55	0.95	1.45

单位: mm