

治具型杠杆式油压缸



HLC系列


Hydraulic lever-type Clamping Cylinder

最大使用压力70kg/cm²


HLC



管接式:

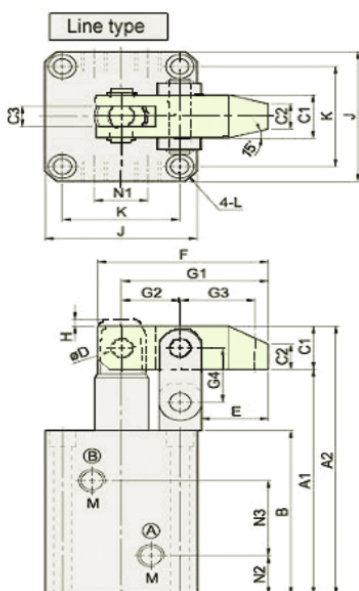

油路板式:

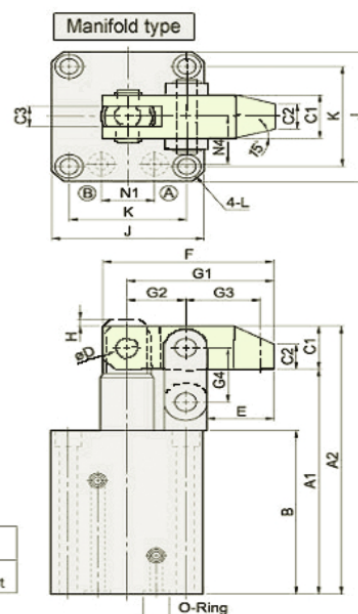

规格型号	管接式	HLC-25	HLC-32	HLC-40	HLC-50	HLC-63
	油路板式	HLC-M25	HLC-M32	HLC-M40	HLC-M50	HLC-M63
气缸内径		Φ25	Φ32	Φ40	Φ50	Φ63
活塞杆径		Φ18	Φ20	Φ22.4	Φ28	Φ35
转角行程		25	25	30	34	40
受压面积 拉入/推出 cm ²		2.37/4.91	4.9/8.04	8.63/12.57	13.47/19.63	21.56/31.17
理论夹持力 30kg/cm ²		116	190	288	453	701
使用流体	已滤清之标准液压油					
最大操作压力	70kg/cm ²					
使用压力范围	5-50kg/cm ²					
作动方式	复动式					
A1		103	112	122	137	155
A2		122	131	144.2	162.4	186.8
B		76	85	90	100	111
C1		□19	□19	□22.2	□25.4	□31.8
C2		11	11	13	15	19
C3		9	9	10	11	15
ΦD		Φ8	Φ8	Φ10	Φ12	Φ15
E		25	25	30	35.5	43
F		64	64	77	90	110
G1		55	55	66	77	94
G2		22	22	26	30	36
G3		28	28	34	39	48
G4		24	24	29	33	39
H		3	3	4	4	4
J		55	57	69	75	96
K		42	44	52	58	75
L		Φ6.8-Φ10.5x6.5D	Φ6.8-Φ10.5x6.5D	Φ9-Φ14x9D	Φ9-Φ14x9D	Φ11-Φ18x11D
M		PT1/8	PT1/8	PT1/4	PT1/4	PT1/4
N1		18	22	26	32	38
N2		17	19	19	21.5	22
N3		33	38	40	45	52
N4		20	22	26	30	38
油封o-ring		P7	P7	P8	P8	P9
重量(Kg)		1.85	2.1	3.3	4.45	8.2

单位: mm