



Hydraulic work support Piping mounting and manifold mounting

WS-BL series



產品說明：

- 筒夾原理設計,外型小可使用在低油壓時產生較高的支撐力道。
- 系列T外螺牙型設計與系列U上法蘭管接式與油路板式一體設計方便多種安裝型式。



Application

- Collet design in compact body can produce large supporting force for low oil pressure.
- Threaded type and Piping mounting and manifold mounting in one cylinder body for upper flange type.




Ordering Example

WS	—	T/U	30	BL
Base No.		Mounting Type	Body Size	Low oil pressure
		T: Thread Type	26,30	
		U: Upper flange	36,40,48,55,65	

WS-UxxBL SERIES

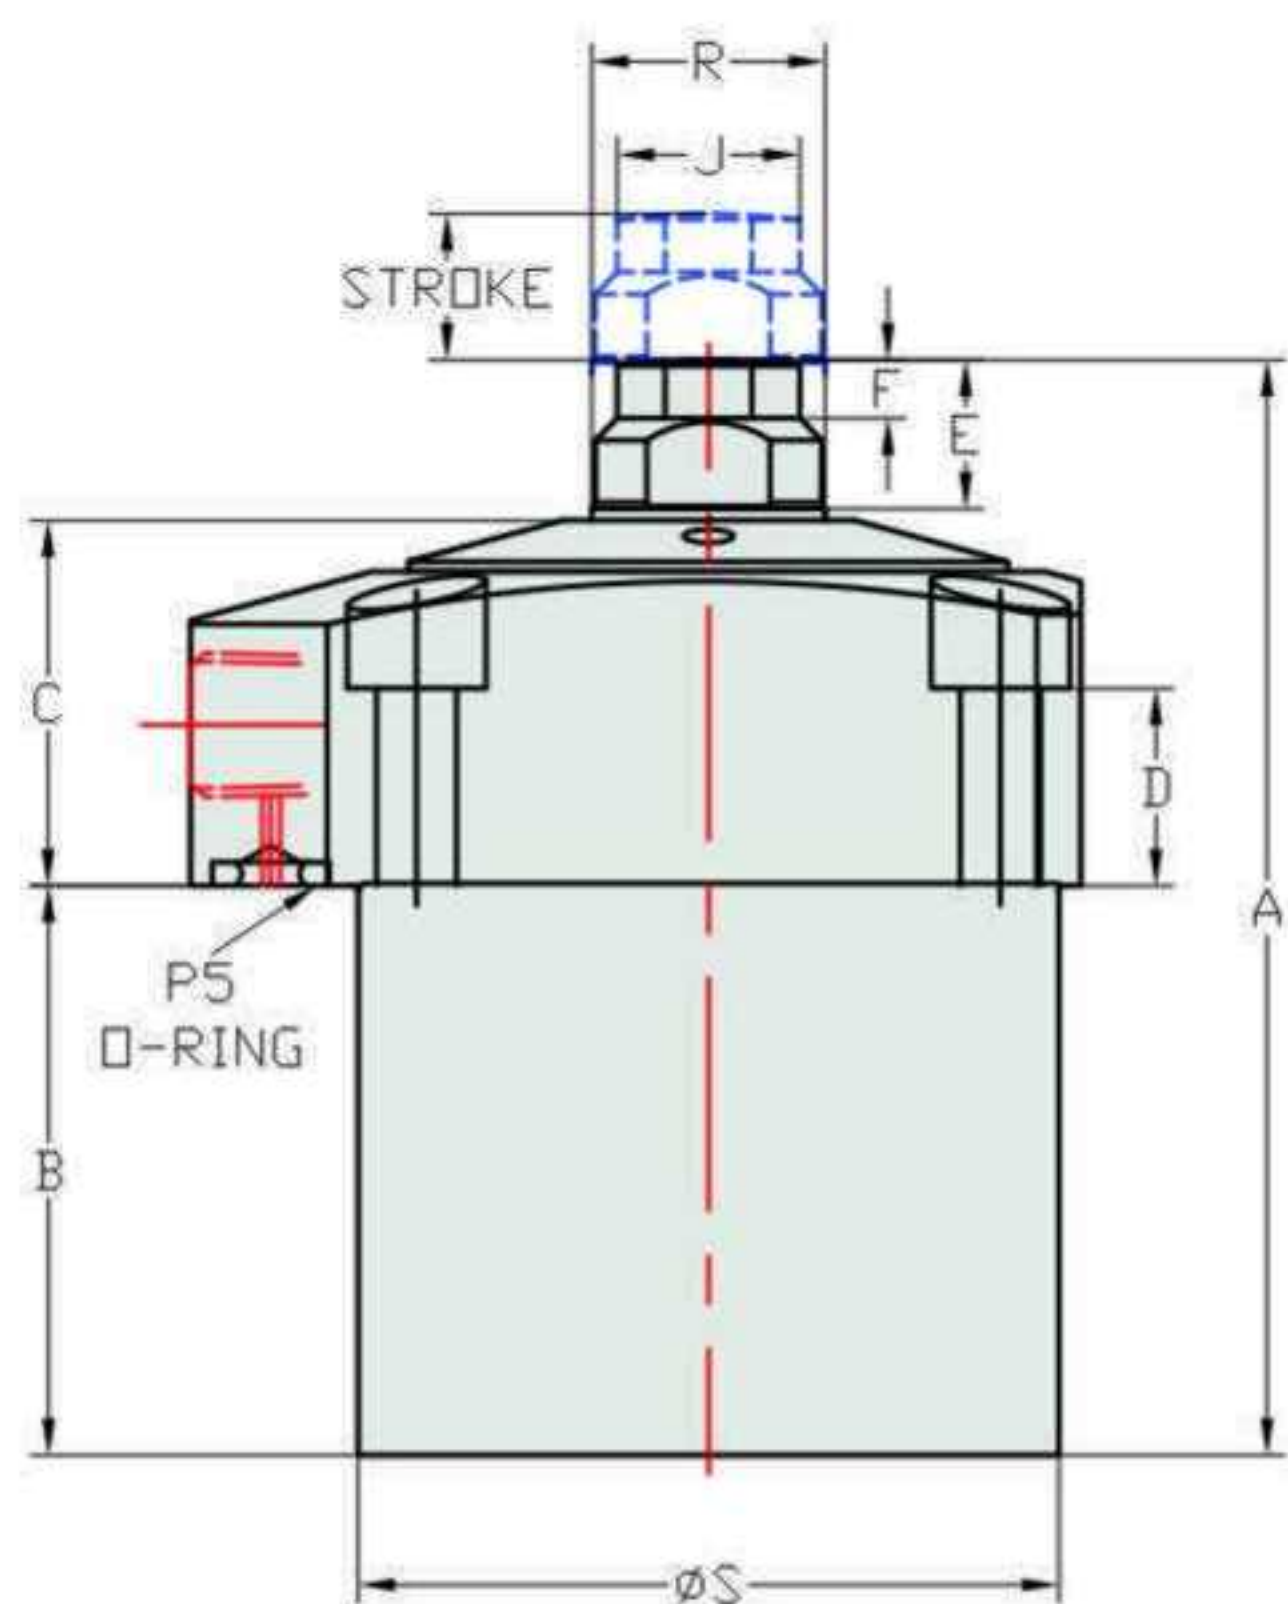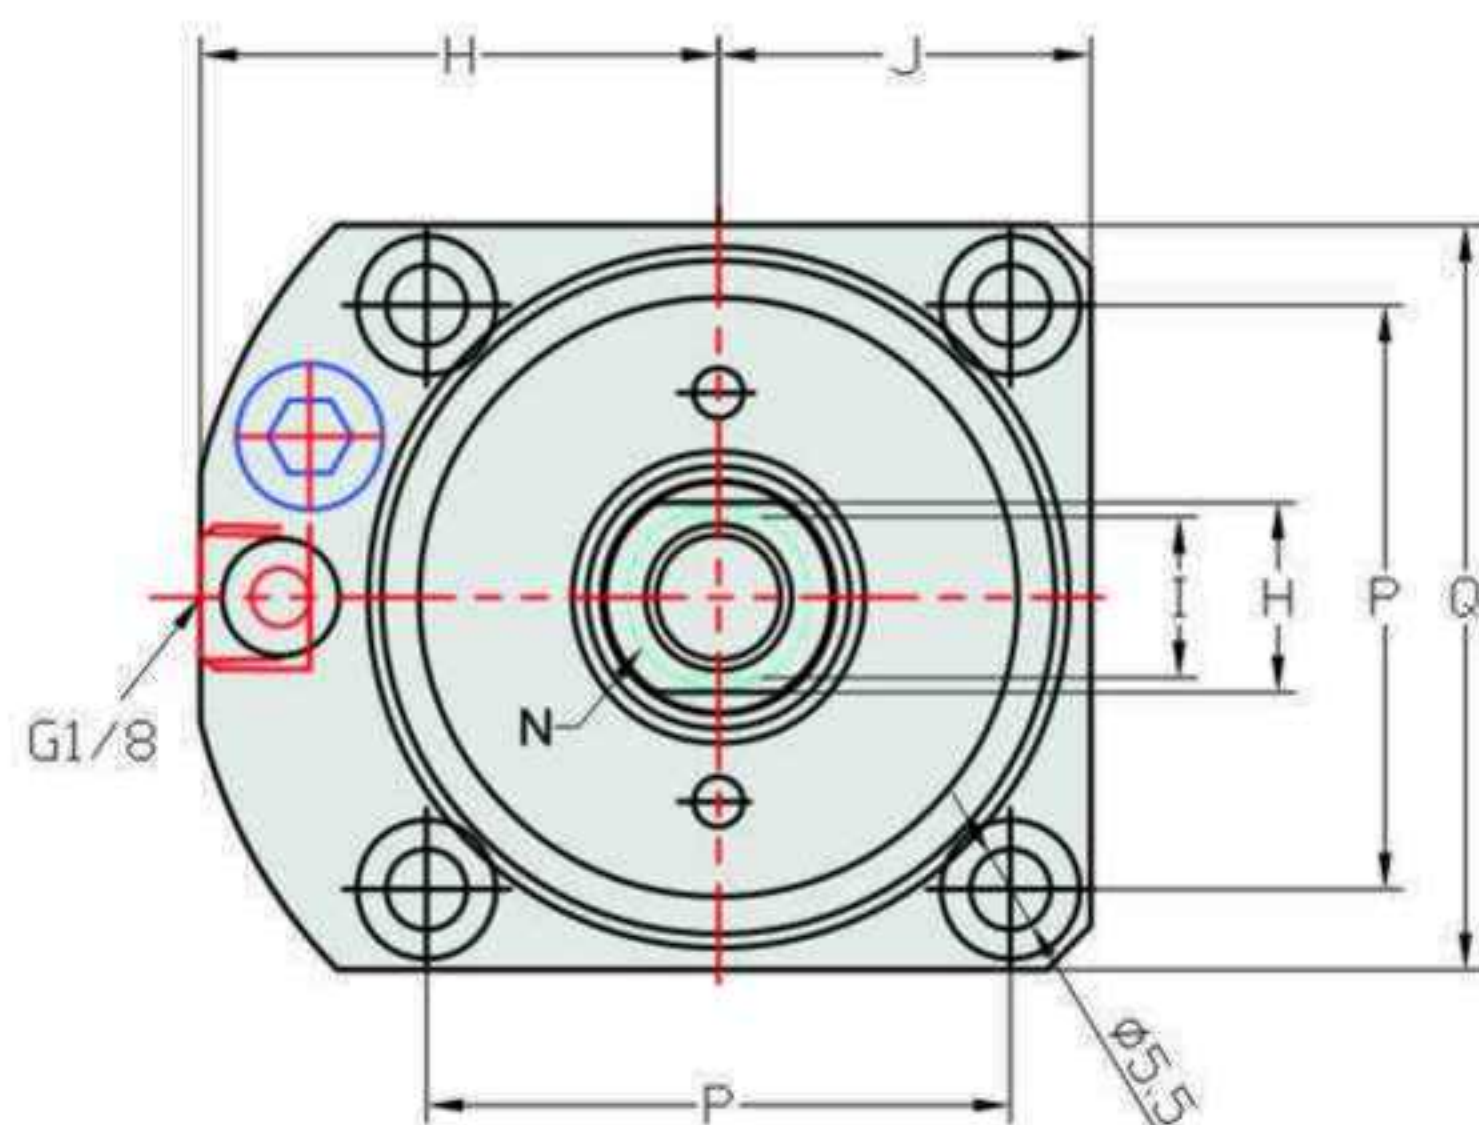

WS-TxxBL SERIES

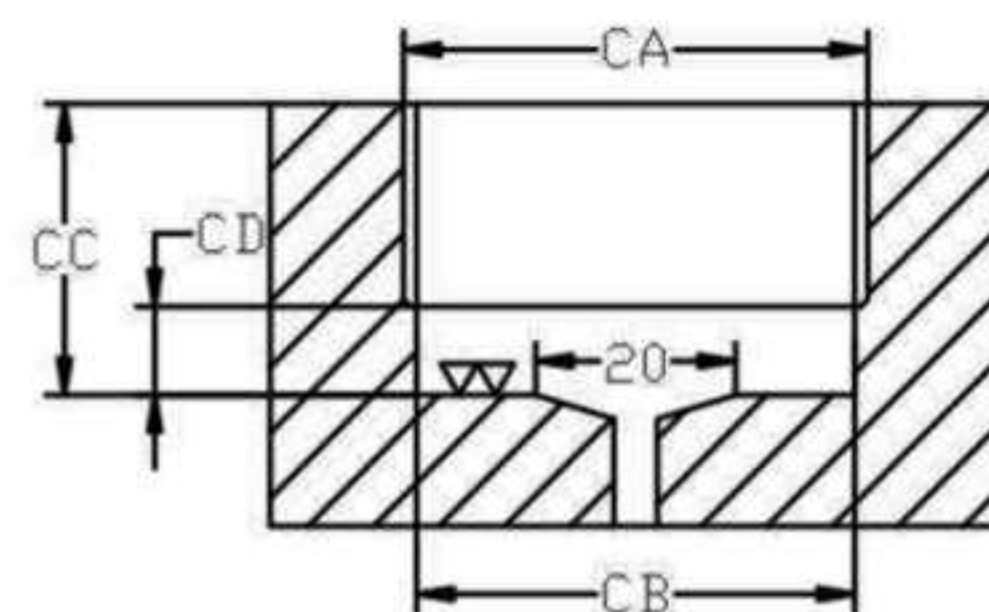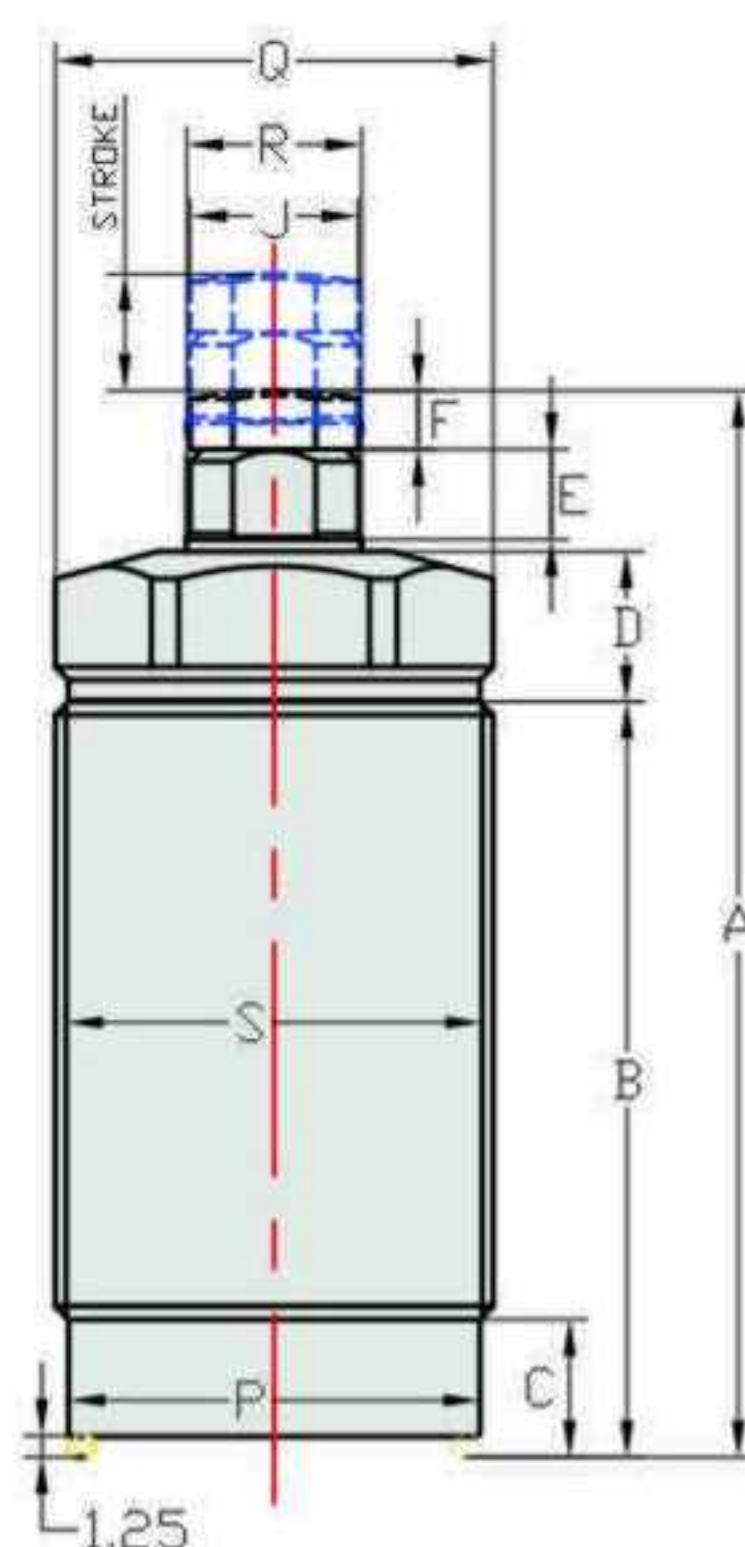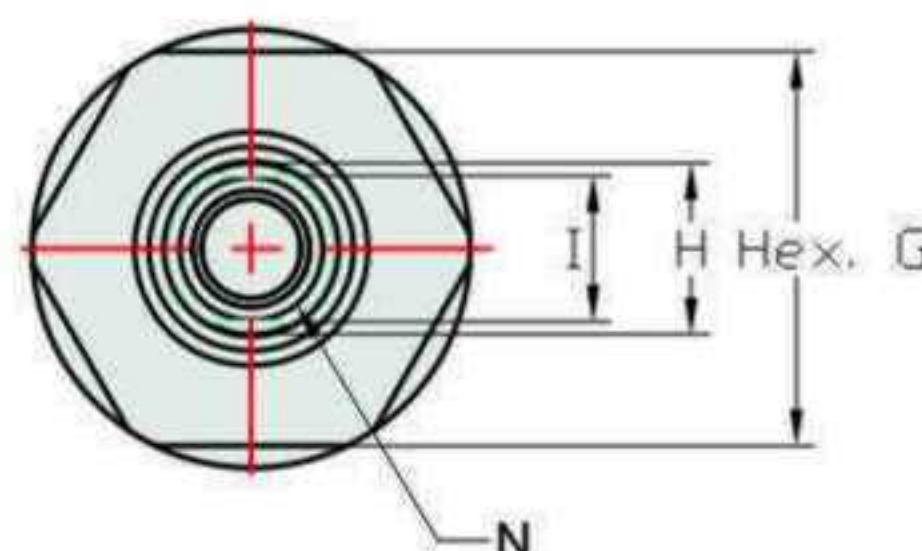

安裝尺寸

MOUNTING DIAGRAM
FOR WS-TxxBL SERIES

Specifications

Model	WS-T26BL	WS-T30BL	WS-T36BL	WS-U40BL	WS-U48BL	WS-U55BL	WS-U65BL
支撐力kg supporting force (70kg/cm ²)	280	300	400	550	720	1100	1700
行程stroke	6.5	8	8	8	10	12	14
最大使用壓力 Max pressure	105kg/cm ²						
一般使用壓力 Normal pressure	25-70kg/cm ²						
A	66	73	69	67	75	85	101
B	48	51.8	50	31	39	45	56
C	6	9.5	8.4	25	25	25	29
D	9	10.2	8	14.5	13.5	11.5	14.5
E	5	7	7	10	10	14	15
F	4	4	4	4	4	6	6
G	24	27	32	—	—	—	—
H	9	8	11	11	12	15	17
I	9	10.5	10.5	11	11	14	14
J	—	—	—	22.5	25.5	30	35
K	—	—	—	31.5	31.5	39	46
N	M6X12D	M6X12D	M8X11D	M10X11D	M10X11D	M12X13D	M12X13D
P	Φ24	Φ28.2	Φ34.2	34	40	47	55
Q	Φ26	Φ30	Φ36	45	51	60	70
ΦR	10	10	13	13	14	18	20
S	M26X1.5	M30X1.5	M36X1.5	Φ40	Φ48	Φ55	Φ65
CA	M26X1.5	M30X1.5	M36X1.5	—	—	—	—
CB	24.3	28.5	34.5	—	—	—	—
CC	20~30	20~50	20~48	—	—	—	—
CD	2	9	8	—	—	—	—
Weight 重量 kg	0.15	0.25	0.35	0.6	0.8	1.4	2.2

unit:mm