



Spring Plungers


MT series

標準化MT-301

圓球頂釘型 WZ8085



使用範例：

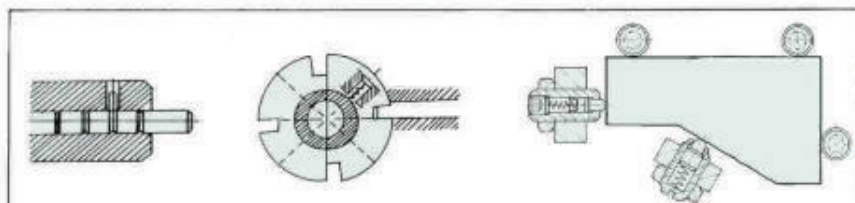



訂購範例：

MT-301 M8


d ₁	l	d ₂	S 彈簧行程/mm	初壓荷重/Kg	最大荷重/Kg
M8	16	4	2	2.0	3.5
M10	19	4.5	2.5	2.0	4.5
M12	22	6	3.5	2.5	6.0
M16	24	8.5	4.5	5.0	9.5

標準化MT-302/303

鋼珠型 WZ-8087/WZ8088



使用範例：

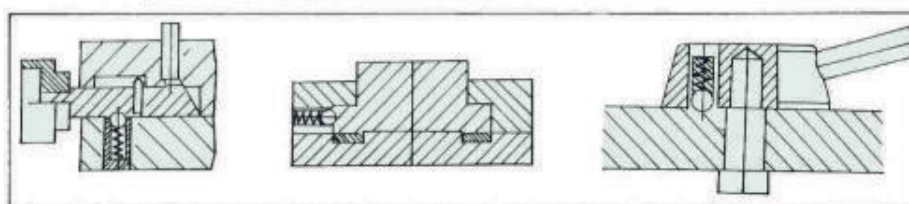

訂購範例：

MT-302 M8

MT-303 M8



標準化	d ₁	l	鋼珠直徑	S 彈簧行程/mm	初壓荷重/Kg	最大荷重/Kg
MT-302	M 4	9	2.5	0.8	0.4	1
一般	M 5	12	3	0.9	0.6	1.1
	M 6	14	3.5	1	0.9	1.3
	M 8	16	5	1.5	1.5	3
	M 10	19	6	2	2	3.5
	M 12	22	8	2.5	3	5.5
	M 16	24	10	3.5	6.5	12.5
MT-303	M 4	9	2.5	0.8	0.4	1
不銹鋼	M 5	12	3	0.9	0.6	1.1
	M 6	14	3.5	1	0.9	1.3
	M 8	16	5	1.5	1.5	3
	M 10	19	6	2	2	3.5
	M 12	22	8	2.5	3	5.5
	M 16	24	10	3.5	6.5	12.5

MT series

Spring Plungers

標準化MT-304

WZ8090



訂購範例:



MT-304 M8

d ₁	d ₂	l	S 彈簧行程/mm	調整螺絲/mm	初壓荷重/Kg	最大荷重/Kg
M 4	1.5	15	1.5	1.3	0.5	1.6
M 5	2.4	18	2.3	1.5	0.6	2
M 6	2.7	20	2.5	2	0.7	2
M 8	3.5	22	3	2.5	0.9	3.5
M 10	4	22	3	3	0.9	3.5
M 12	6	28	4	4	1	5.5
M 16	7.5	32	5	5	4.5	10

有六角及內槽可作固定或調整之用

標準化MT-305

WZ8091

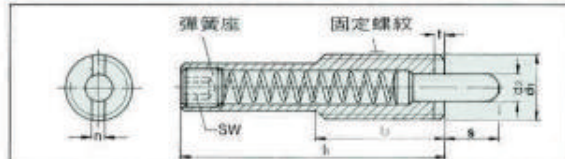

訂購範例:



MT-305 M12X10

d ₁	s	d ₂	l ₁	l ₂	n	t	SW	次壓荷重 N	最大荷重 N
M 12	10	5.5	43	35	2.7	2	4	4	20
M 16	15	7.5	60	35	3.2	2.5	5	10	40
M 16	30	7.5	120	35	3.2	2.5	5	18	40

這些特別長之定位柱用于金屬成型模具之頂料梢

標準化MT-306

WZ8093

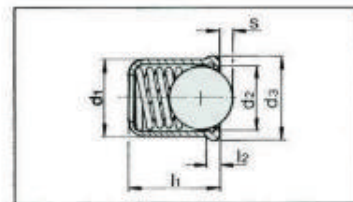

訂購範例:

MT-306

d ₁	d ₂	d ₃	h	l ₂	S 彈簧行程/mm	荷重/Kg
4	3	4.5	5	1	0.7	0.4
5	4	5.5	6	1	1	0.5
6	5	6.5	7	1	1.5	0.6
8	6.5	8.5	9	1	1.8	0.7

標準化MT-307

鋼珠全硬化式定位柱
WZ8094

應用範例：


自動校正式定位墊，用來
作工模及夾具之止動、支
架及推力元件。

訂購範例：


MT-307 C13 M8

— d_2
— d_1
— 型式

Typ C
Type C




Typ F
Type F




規格型號	d_1	d_2	d_3	h	l_2	d_4	SW	最大靜負荷 KN
C/F	13	M 8	7.2	13	8	10	11	10
C/F	20	M10	10.5	18	10	16	17	25
C/F	20	M12	10.5	18	12	16	17	25

Typ G
Type G



Typ J
Type J







規格型號	d_{1nG}	d_2	d_3	l	d_4	裝配孔深 d_{H7}	最大靜負荷 KN
G/J	12	M3	7.2	11	10	12x6min	10*
G/J	18	M4	10.5	17	16	18x8 min	25*
G/J	28	M5	20	25	25	28x13 min	90*

MT-308


鋼珠全硬化式定位柱 WZ8095

- 。A型鋼珠用于鏡面接觸面。
- 。D型塑膠珠用于較易碎或對壓力較敏感之接觸面。
- 。B型、F型——平面鋼珠（F型有壓紋）用于表面不平行、由于鋼珠有9°傾斜擺動之能力，因此作為固定或支撐時不會扭曲。

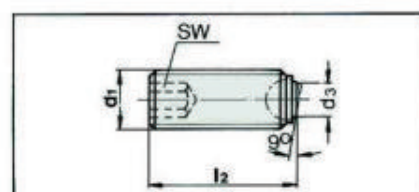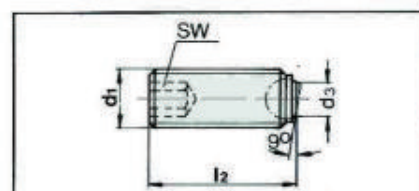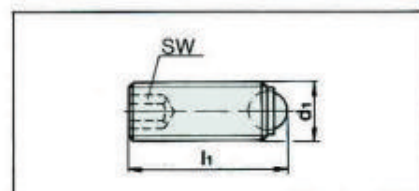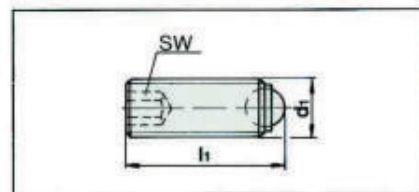

訂購範例：

MT-308 AM6X10.8



規格型號	d ₁	d ₃	l ₁	l ₂	d ₄	SW	最大負荷 KN
A/D	M 6	3.2	10.8	—	4	3	9
B	M 6	3.2	—	10	4	3	9*
A/D	M 6	3.2	16.8	—	4	3	9
B	M 6	3.2	—	16	4	3	9*
A/D	M 8	4.5	13.2	—	5.5	4	15
B	M 8	4.5	—	12	5.5	4	15*
A/D	M 8	4.5	31.2	—	5.5	4	15
B	M 8	4.5	—	30	5.5	4	15*
A/D	M 10	6	17.7	—	7	5	20
B/F	M 10	6	—	16	7	5	20*
A/D	M 10	6	36.7	—	7	5	20
B/F	M 10	6	—	35	7	5	20*
A/D	M 12	7.2	22	—	8.5	6	30
B/F	M 12	7.2	—	20	8.5	6	30*
A/D	M 12	7.2	42	—	8.5	6	30
B/F	M 12	7.2	—	40	8.5	6	30*
A	M 16	10.7	28.3	—	12	8	60
B/F	M 16	10.7	—	25	12	8	60*
A	M 16	10.7	53.3	—	12	8	60
B/F	M 16	10.7	—	50	12	8	60*