

SMA(シェルエンドミルアーバ型) SMA(SHELL END MILL ARBOR TYPE A)



Fig.1


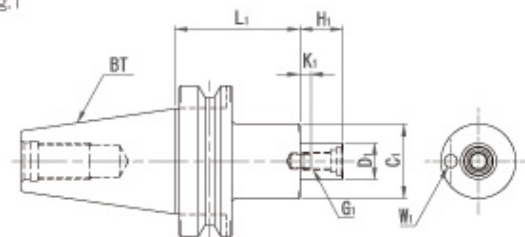


Fig.2

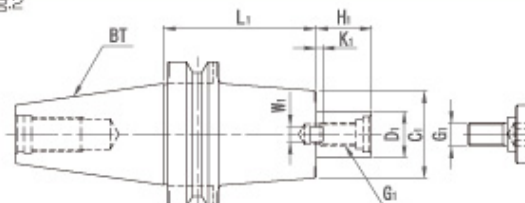

(単位: mm)

コード Code		図 Fig.	D1 (h6)	L1	C1	H1	W1	K1	G1	重量 (kg) Weight	
ミリサイズ Millimeters size	BT40-SMA16- 60	1	16	60	34	15	8	4	M 8	1.7	
	-120			120						2.1	
	-SMA22- 60		22	22	60	42	17	10	5	M10	1.8
	-120				120						2.4
	-180				180						3.0
	-SMA27- 45	2	27	45	50	19	12	5.5	M12	1.7	
	- 60			60						2.0	
	-105			105						2.7	
	-150			150						3.6	
	-SMA32- 45		32	32	45	60	23	14	6	M16	1.9
	- 60				60						2.8
	- 90				90						3.7
	-SMA40- 60				40						40
	- 90	90	3.7								
	BT50-SMA16- 75	1	16	75	34	17	8	3	M 8	4.2	
	-120			120						5.8	
	-SMA22- 75		22	22	75	42		27	3.5	M10	4.3
	-120				120						4.8
	-180				180						5.5
	-SMA27- 60	2	27	60	50	36	10	4	M12	4.3	
	-105			105						5.2	
	-150			150						5.8	
	-SMA32- 45			32						32	45
	- 75		75		5.2						
	-105		105		6.2						
	-SMA40- 45		40		40	45		80	12		5
- 75	75			5.5							
インチサイズ Inch size	BT40-SMA15.875- 60	1	15.875	60	34	17	8	3	M 8	1.7	
	-120			120						2.1	
	-SMA22.225- 60		22.225	22.225	60	42		27	3.5	M10	1.8
	-120				120						2.4
	-180				180						3.0
	-SMA25.4 - 45	2	25.4	45	50	36	10	4	M12	1.7	
	- 60			60						2.0	
	-105			105						2.7	
	-150			150						3.6	
	-SMA31.75 - 45		31.75	31.75	45	60		38	4.5	M16	1.9
	- 60				60						2.8
	- 90				90						3.7
	-SMA38.1 - 60				38.1						38.1
	- 90	90	3.9								
	BT50-SMA15.875- 75	1	15.875	75	34	17	8	3	M 8	4.2	
	-120			120						5.8	
	-SMA22.225- 75		22.225	22.225	75	42		27	3.5	M10	4.3
	-120				120						4.8
	-180				180						5.5
	-SMA25.4 - 60	2	25.4	60	50	36	10	4	M12	4.3	
	-105			105						5.2	
	-150			150						5.8	
	-SMA31.75 - 45			31.75						31.75	45
	- 75		75		5.2						
	-105		105		6.2						
	-SMA38.1 - 45		38.1		38.1	45		80	12		5
	- 75			75		5.5					

1. 全ての製品にT型締付ボルトが付属します。
2. W1が10以下の製品にはノックピン(1個)が、それ以外の製品にはキー(2個)が付属します。
3. TMTツールシステムに準じています。
4. カッターは付属していません。また、弊社ではお取り扱いしておりません。
5. カッターは三菱マテリアル(F365)、タンガロイ(CSE)、住友電気工業(HEP)の超硬ろう付カッターを対象としています。

1. T-type tightening bolts come with all products.
2. A dowel pin (one) is supplied with products whose W1 is 10 or less, while two keys are supplied with other products.
3. This product conforms to TMT standards.
4. Cutters are not supplied with the product and we do not handle such products.
5. The cutter is intended for ultra-hard brazed cutters made by Mitsubishi Metal Corp. (F365), Tungaloy Corporation (CSE), and Sumitomo Electric Industries, Ltd. (HEP)