


カトウタッパー SA-III型 KATO TAPPER/Tapper body model SA-III タップコレット TC型 Tap collet model TC

カトウタッパー (SA-III型) KATO TAPPER/Tapper body model SA-III

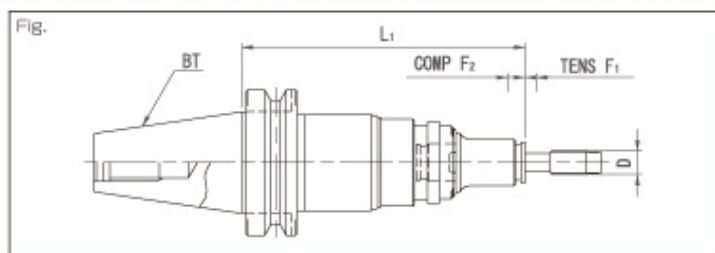

(単位: mm)

コード Code	L ₁	F ₁	F ₂	D	タップコレット Tap collet	重量 (kg) Weight	
BT40-SA 206-Ⅲ	120	5	10	M 2～6	TC 206	1.19	
-SA 412-Ⅲ	150			M 4～12	TC 412	1.70	
-SA1022-Ⅲ	195	6		M10～22	TC1022	2.62	
-SA2035-Ⅲ	240	7		M20～35	TC2035	4.03	
BT50-SA 206-Ⅲ	150	5	10	M 2～6	TC 206	3.85	
-SA 412-Ⅲ				M 4～12	TC 412	4.15	
-SA1022-Ⅲ		195		6	M10～22	TC1022	4.98
-SA2035-Ⅲ		225		7	M20～35	TC2035	5.74
-SA3050-Ⅲ	285	8	15	M30～50	TC3050	8.80	


1. 本製品はカトウ工機(株)の製品です。製品の詳細は同社発行の製品カタログをご覧ください。
2. 本製品はメーカー取寄品です。

1. This product is manufactured by KATO Mfg. Co., Ltd. See the product catalog published by KATO for more product information.
2. This product is available by ordering from the manufacturer.



タップコレット (TC型) Tap collet model TC

(単位: mm)

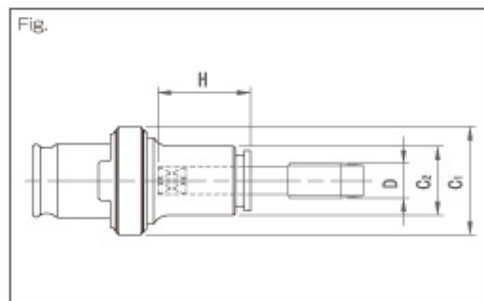

1. ご注文時には型式とタップサイズをご指定下さい。

【ご注文例】
TC1022-M22 / TC3050-U7/8 / TC412-P1/8 など
2. 標準タイプとは別にトルク調整製品があります。

- ①イエロータイプ: トルクを標準の20% ダウンに設定
アルミ、軽金属等の難切削材向け
ご注文時にはコードの末尾に「-イエロー」を付けて下さい。
- ②レッドタイプ: トルクを標準の30% アップに設定
ステンレス・特殊鋼等の難切削材向け
ご注文時にはコードの末尾に「-レッド」を付けて下さい。
3. 本製品はカトウ工機(株)の製品です。製品の詳細は同社発行の製品カタログをご覧ください。
4. 本製品はメーカー取寄品です。

	D			H	C1	C2
	M	U	P			
TC206	2	No.2		20	21	15
	3	No.6		21		
	4	No.8	-	22		
	5	No.12				
	6	1/4				
	4	No.8		26	33	20
TC412	5	No.12				
	6	1/4				
	-	5/16		27		
	8	-		28		
	10	3/8		29		
TC1022	11	7/16	1/8	38	50	32
	12	-		39		
	-	1/2		40		
	14	9/16		41		
	-	5/8		42		
	16	-		43		
	18	3/4		44		
	20	-		45		
	22	7/8		46		
	24	-		48		
	-	-	1/8	29		
	-	-	1/4	32		
	-	-	3/8	34		
	-	-	1/2	39		
	-	-	5/8	40		

1. Specify the model and tap size when placing an order. [Example of ordering] TC1022-M22/ TC3050-U7/8/TC412-P1/8, etc.
2. We also have products with controlled torque in addition to standard types.

- [1] Yellow type: The torque is set to 20% lower than the standard. Intended for light cutting materials, such as aluminum and lightweight metal. Please add "-yellow" to the end of the code when ordering.
- [2] Red type: The torque is set to 30% higher than the standard. Intended for materials that are difficult to cut, such as stainless and special alloy steel. Please add "-red" to the end of the code when ordering.

3. This product is manufactured by KATO Mfg. Co., Ltd. See the product catalog published by KATO for more product information.
4. This product is available by ordering from the manufacturer.

	D			H	C1	C2
	M	U	P			
TC206	20	-		46	70	46
	22	7/8		47		
	24	-		49		
	27	1				
	28	-				
	-	1 1/8		56		
	30	-				
	32	1 1/4		58		
	33	-		60		
	35	1 3/8				
TC412	-	-	1/2	39	87	64
	-	-	5/8	40		
	-	-	3/4	42		
	-	-	7/8	44		
	-	-	1	46		
	30	-		57		
	32	1 1/4		59		
	33	-				
	35	1 3/8		61		
	36	-		63		
	39	1 1/2		67		
	42	-		69		
	45	1 3/4		72		
	48	-				
TC3050	50	2		42	87	64
	52	-		44		
	-	-	3/4	46		
	-	-	1 1/8	52		
	-	-	1 1/4	54		
	-	-	1 3/4	57		