




Motor driver with dual lead worm transmission
Built-in 3 pcs Hirth coupling,
each every 1 or 5 degrees indexing (72D or 60D)
Hydraulic clamping system, Hydraulic Pressure=35kg/cm²
※ Horizontal position only

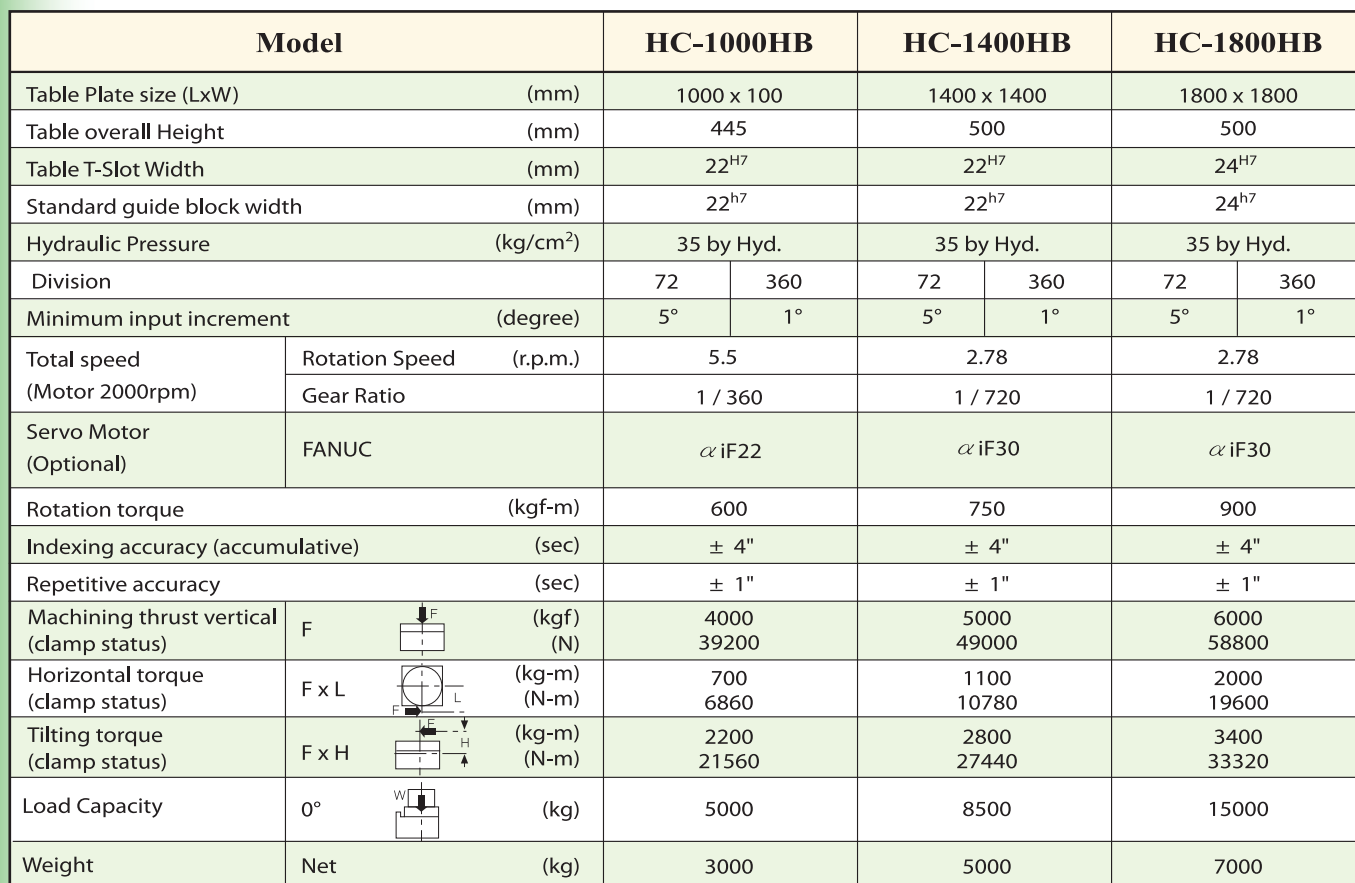

* The list of fitting servomotor, please refer to page 43.

Guaranteed inspection accuracy

NO	Inspection Items	HC-1000HB	HC-1400HB	HC-1800HB
1	Concentricity of center hole	0.01	0.01	0.01
2	Table run out mm	0.02	0.02	0.03
3	Table straightness mm	0.02	0.03	0.04
4	Parallelism between plate and base mm	0.02	0.03	0.04
5	Square of side reference plane mm	0.02	0.03	0.04
6	T-Slot tolerance mm	0.02	0.02	0.02