




BTS

Support Tailstock with Hydraulic clamping system

The heavy-duty BTS Series is fitted with a hydraulic distortion-free brake assembly, this series is also used for heavy loads when several Tables are fabricated together to achieve a Two-Axis Rotary-Tilting assembly.

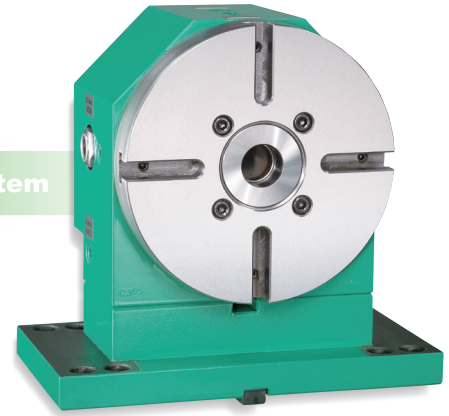

BTS Support Tailstock with Hydraulic Clamping											Suitable model		
Mode	Central heightA	B	C	D	E	F	G	K	T	Net weight	NCT	HC	CT-V
BTS-125	110	190	200	150	40 ^{H7}	25	14 ^{h7}	70	12 ^{H7}	30	NCT-125		
BTS-170	135	220	170	125	30 ^{H7}	25	14 ^{h7}	94	12 ^{H7}	27	NCT-170		
	135	220								27	NCT-200	HC-200	
	155	240								33			CT-200V
BTS-200	155	255	200	160	30 ^{H7}	27	18 ^{h7}	100	12 ^{H7}	41			CT-200V
	170	270								47	NCT-250	HC-250	
	210	310								55			CT-250V
BTS-250	170	300	260	190	50 ^{H7}	32	18 ^{h7}	120	12 ^{H7}	79	NCT-250		
	210	340								85	NCT-320		CT-250V
	230	360								90		HC-320	CT-320V
BTS-320	210	370	320	195	50 ^{H7}	32	18 ^{h7}	150	14 ^{H7}	116	NCT-320		
	230	390								120		HC-320	CT-320V
	250	410								122	NCT-400	HC-400	
BTS-400	250	455	410	230	60 ^{H7}	51	18 ^{h7}	140	14 ^{H7}	238	NCT-400	HC-400	
	310	515								258	NCT-500	HC-500	
	400	605								290	NCT-630		
	480	685								350	NCT-800		

BTS

