



支持類

SU01~SU28



LOCATING CYLINDER

SHOULDER SUPPORT CYLINDER

OFFSET JIG REST BUTTON


JIG REST BUTTON

SU01


圓形支持墊圈 JIG REST BUTTON



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：固定於基板或基座上，支持工件用。



MODEL NO.	A	B	C	D	kg
SU01-1230	30	40	M12	17	0.24
SU01-1240	40	40	M12	27	0.32
SU01-1250	50	40	M12	37	0.41
SU01-1630	30	50	M16	12	0.36
SU01-1640	40	50	M16	22	0.50
SU01-1650	50	50	M16	32	0.64




SU02

偏心支持墊圈 OFFSET JIG REST BUTTON



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：支持工件用。
- 特長：支持點遇干涉時，可做適當之迴避。

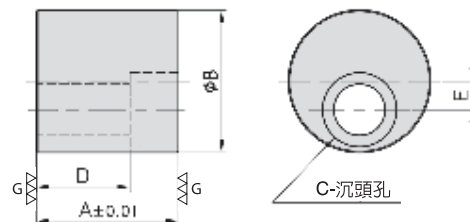

MODEL NO.	A	B	C	D	E	kg
SU02-1230	30	40	M12	17	7	0.24
SU02-1240	40	40	M12	27	7	0.32
SU02-1250	50	40	M12	37	7	0.41
SU02-1630	30	50	M16	12	10	0.36
SU02-1640	40	50	M16	22	10	0.50
SU02-1650	50	50	M16	32	10	0.64




SU03


肩部支持墊圈 SHOULDER SUPPORT CYLINDER



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：可同時作為支持工件與定位用




MODEL NO.	A	B	C	D	E	F	G	Kg
SU03-1230	30	40	40	60	12	20	12	0.68
SU03-1240	40	50	40	60	12	20	12	0.88
SU03-1250	50	60	40	60	12	20	12	1.10
SU03-1630	30	40	50	75	16	26	15	1.08
SU03-1640	40	50	50	75	16	26	15	1.40
SU03-1650	50	60	50	75	16	26	15	1.70




SU04


定位支持墊圈 LOCATING CYLINDER



- 材質：S45C
- 熱處理：HRC 40°
- 用途：可作為支持工件與定位用



MODEL NO.	A	B	C	D	E	kg
SU04-1230	30	40	12	20	12	0.24
SU04-1240	40	40	12	20	12	0.32
SU04-1250	50	40	12	20	12	0.40
SU04-1630	30	50	16	26	12	0.37
SU04-1640	40	50	16	26	15	0.49
SU04-1650	50	50	16	26	15	0.60





SU05

方型墊塊 SQUARE ADAPTER



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：可選擇適當之孔位，安裝支持件或夾持件靈活運用。

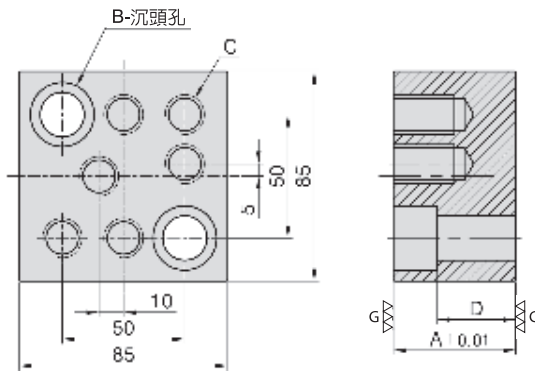



MODEL NO.	A	B	C	D	kg
SU05-1230	30	M12	M12	17	1.50
SU05-1240	40	M12	M12	27	2.00
SU05-1250	50	M12	M12	37	2.25
SU05-1630	30	M16	M16	12	1.30
SU05-1640	40	M16	M16	22	1.80
SU05-1650	50	M16	M16	32	2.22

SU07

方型墊塊 SQUARE ADAPTER



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：可選擇適當之孔位，安裝支持件或夾持件靈活應用。

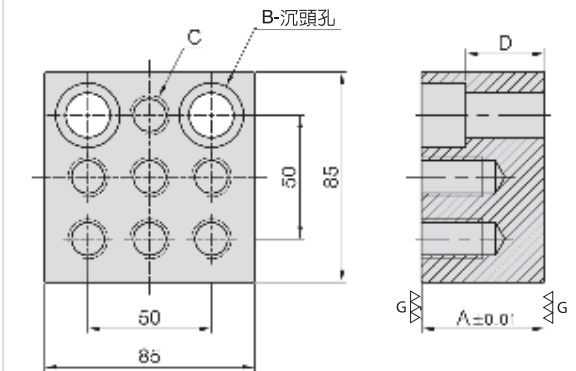


MODEL NO.	A	B	C	D	kg
SU07-1230	30	M12	M12	17	1.5
SU07-1240	40	M12	M12	27	2.0
SU07-1250	50	M12	M12	37	2.6
SU07-1630	30	M16	M16	12	1.3
SU07-1640	40	M16	M16	22	1.8
SU07-1650	50	M16	M16	32	2.2

SU06

方型墊塊 SQUARE ADAPTER



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：可選擇適當之孔位，安裝支持件或夾持件靈活應用。

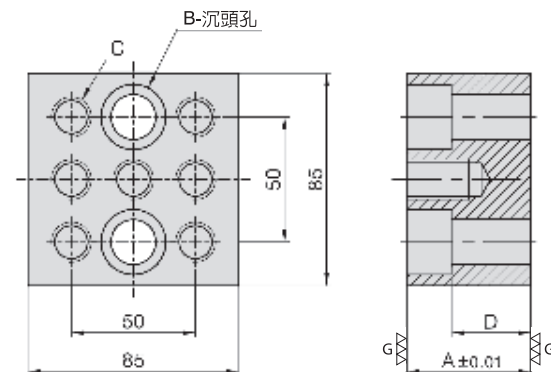



MODEL NO.	A	B	C	D	kg
SU06-1230	30	M12	M12	17	1.50
SU06-1240	40	M12	M12	27	2.00
SU06-1250	50	M12	M12	37	2.60
SU06-1630	30	M16	M16	12	1.30
SU06-1640	40	M16	M16	22	1.80
SU06-1650	50	M16	M16	32	2.25

SU08

移動式墊塊 EXTENSION SUPPORT



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：因應工件固定位置，可做適當之移動。

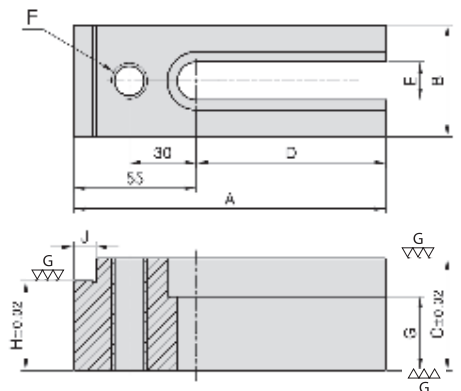



MODEL NO.	A	B	C	D	E	F	G	H	J	kg
SU08-12140-30	140	40	40	85	13	M12	26	30	10	1.3
SU08-16140-30	140	50	40	85	17	M16	22	30	10	1.5
SU08-12140-40	140	40	50	85	13	M12	36	40	10	1.6
SU08-16140-40	140	50	50	85	17	M16	32	40	10	1.9

SU09

移動式墊塊 EXTENSION SUPPORT



- 材質：S45C
- 熱處理：HRC 40°
- 表面：染黑處理
- 用途：因應工件固定位置，可作適當之移動。

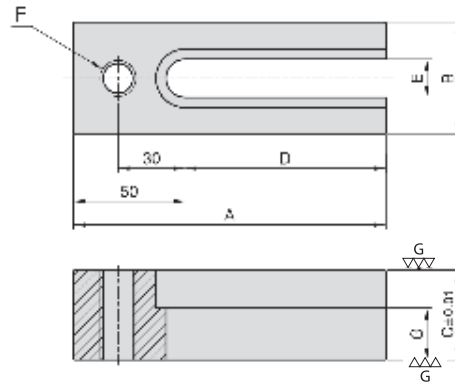



MODEL NO.	A	B	C	D	E	F	G	kg
SU09-12120-30	120	40	30	70	13	M12	16	0.85
SU09-16140-30	140	50	30	90	17	M16	12	1.14
SU09-12120-40	120	40	40	70	13	M12	26	1.10
SU09-16140-40	140	50	40	90	17	M16	22	1.52

SU10

連結桿 RISER CYLINDER




- 材質：S45C
- 熱處理：HRC 38°
- 表面：染黑處理
- 用途：支持件與夾持件延長或加高之用

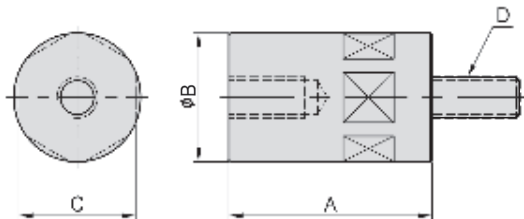

MODEL NO.	A	B	C	D	kg
SU10-1250	50	40	36	M12	0.45
SU10-1265	65	40	36	M12	0.59
SU10-1280	80	40	36	M12	0.74
SU10-1650	50	50	46	M16	0.72
SU10-1665	65	50	46	M16	0.84
SU10-1680	80	50	46	M16	1.20




- 材質：S45C
- 熱處理：HRC 38°~40°
- 表面：染黑處理
- 用途：可與 PT12 之治具零件配合使用



SU11

可調式頂桿 SUPPORT JACK

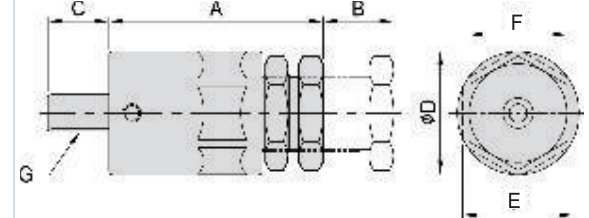



MODEL NO.	A	B	C	D	E	F	G	kg
SU11-1265	65	20	20	40	36	32	M12	0.54
SU11-1665	65	20	20	50	46	36	M16	0.82

SU12

基準墊塊 POSITIONING EDGE SUPPORT



- 材質：S45C
- 熱處理：高週波
- 用途：可作支持工件與定位用

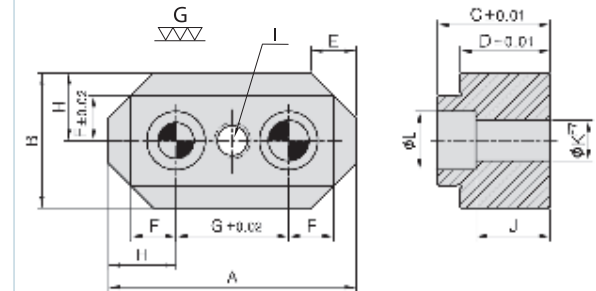

MODEL NO.	A	B	C	D	E	F	G	H	I	J	K	L	kg
SU12-1230	110	60	40	30	20	20	50	30	M12	22	12	20	1.50
SU12-1240	110	60	50	40	20	20	50	30	M12	32	12	20	1.92
SU12-1630	110	60	40	30	20	20	50	30	M16	17	16	26	1.40
SU12-1640	110	60	50	40	20	20	50	30	M16	26	16	26	1.80

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE

其他類

技術
資料




- 材質：S45C
- 熱處理：HRC 45°
- 表面：染黑處理
- 用途：可作支持工件用與定位用



SU13


基準墊塊 POSITIONING EDGE SUPPORT

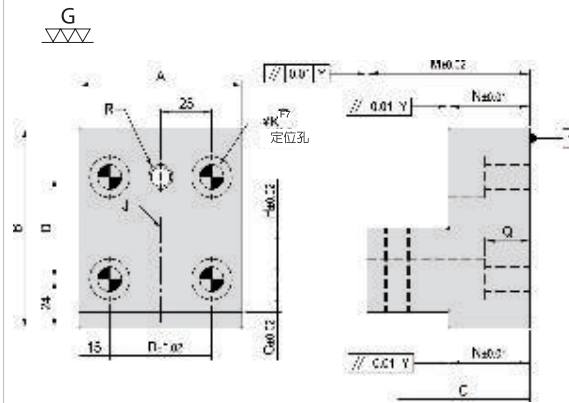

MODEL NO.	A	B	C	D	G	H	J	K	M	N	Q	R	kg
SU13-1240	80	98	65	50	16	25	M12	12	80	40	22	M12	3.00
SU13-1640	80	98	65	50	16	25	M16	16	80	40	16	M16	2.64




- 材質：S45C
- 熱處理：HRC 45°
- 表面：染黑處理
- 用途：與 SU14 組立成 V 形塊，配合工件尺寸，利用定位孔，支持範圍可作適當之調整。



SU15


V型基準塊 SPLIT V BLOCK

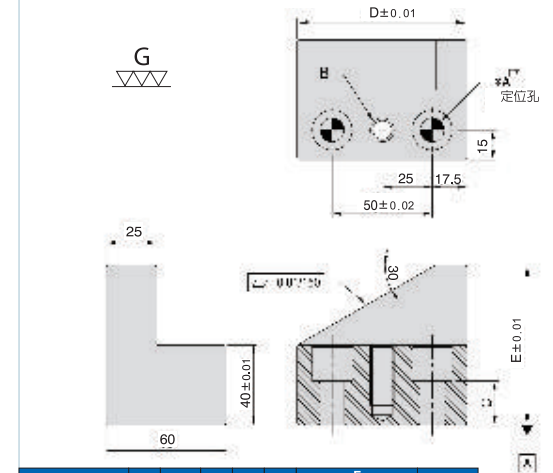

MODEL NO.	A	B	C	D	E	F		kg
SU15-1250-600	12	M12	22	85	80	Max.	Min.	1.86
SU15-1650-600	16	M16	16	85	80	600	50	1.74




- 材質：S45C
- 熱處理：HRC 45°
- 表面：染黑處理
- 用途：與 SU15 組立成 V 形塊，配合工件尺寸，利用定位孔，支持範圍可作適當之調整。



SU14

V型基準塊 SPLIT V BLOCK

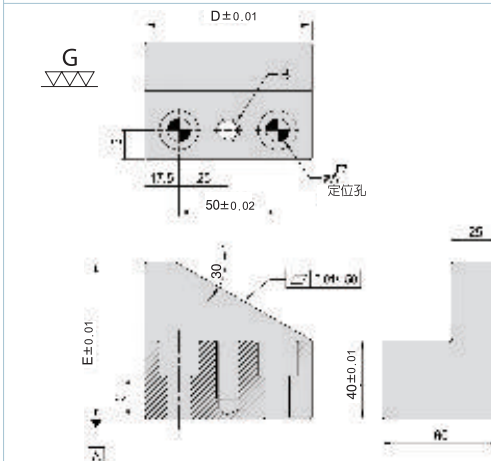

MODEL NO.	A	B	C	D	E	F		kg
SU14-1250-600	12	M12	22	85	80	600	50	1.86
SU14-1650-600	16	M16	16	85	80	600	50	1.76




- 材質：S45C
- 熱處理：HRC 45° 以上
- 用途：可以兩塊組成一 V 形塊，或單一使用



SU16

V型基準塊 V BLOCK

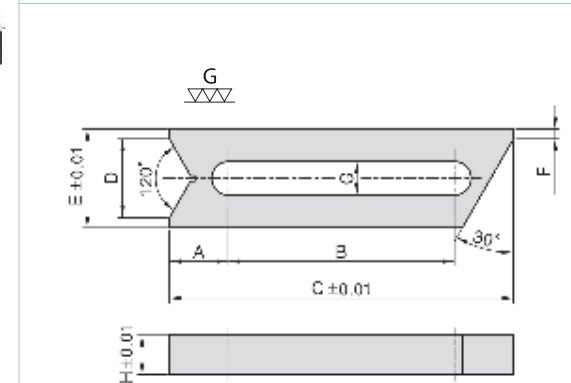

MODEL NO.	A	B	C	D	E	F	G	H	kg
SU16-12150	28	94	150	34	40	5	13	20	0.65
SU16-16175	30	115	175	40	50	5	17	20	0.90

BP

BPA

BC

CP

SU

PT

SVE

ALV


OK-
VISE

其他類

技術
資料




- 材質：S45C
- 熱處理：HRC 45°
- 表面：染黑處理
- 用途：可作支持圓形工件用。



SU17


V型基準塊 V BLOCK

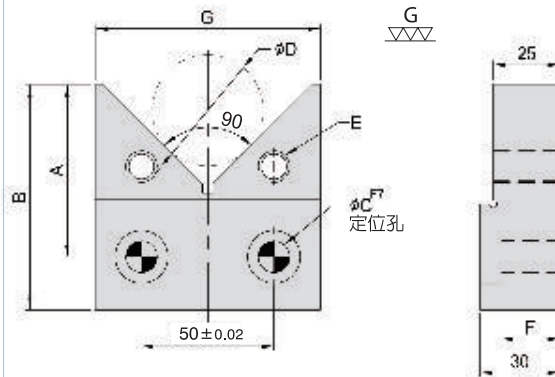

MODEL NO.	A	B	C	D	E	F	G	kg
SU17-1215-080	65	85	12	Max. 80	15	M12	22	1.10
SU17-1215-100	75	95		100				1.30
SU17-1615-080	65	85	16	80	15	M16	25	1.02
SU17-1615-100	75	95		100				1.20




- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：工件定位用，可做適當之調整。



SU19

可調式基準桿 ADJUSTABLE STOP

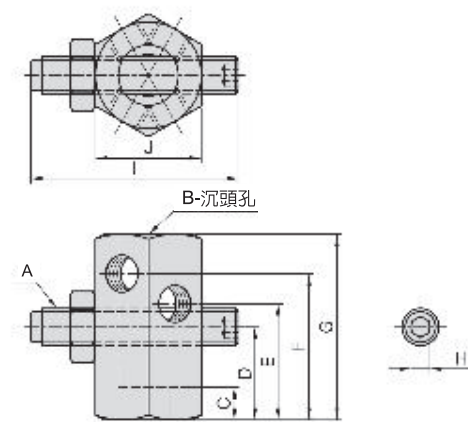

MODEL NO.	A	B	C	D	E	F	G	H	I	J	kg
SU19-1280	M12	M12	12	32	40	50	60	6	80	36	0.43
SU19-1690	M16	M16	14	40	50	63	80	8	90	46	0.89




- 材質：S45C
- 熱處理：HRC 38°~42°
- 表面：染黑處理
- 用途：支持工件之用
- 特長：依工件之高度，螺栓放鬆後，支持高度會自動調整，加工時具防震功能。



SU18


彈性支持桿 SUPPORT JACK

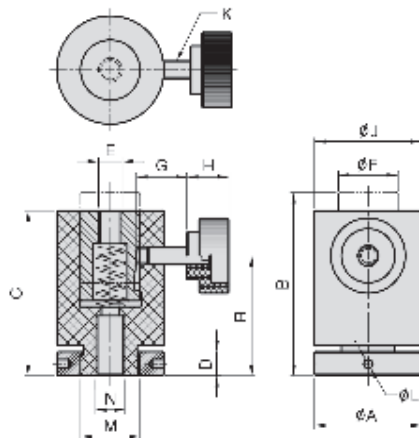

MODEL NO.	A	B	C	D	E	F	G	H	J	K	L	M	N	R	kg
SU18-3655	36	61	55	8	M 8	20	17	14	36	M 6	3	M20	M10	40	0.43
SU18-4270	42	79	70	9	M10	25	25	17	42	M 8	4	M24	M12	50	0.73
SU18-5085	50	100	87	10	M12	30	27	20	50	M10	5	M30	M16	62	1.30




- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：工件定位用，可作適當之調整。



SU20

小型可調式基準桿 MINI ADJUSTABLE STOP

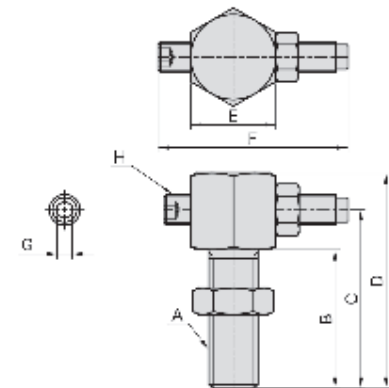

MODEL NO.	A	B	C	D	E	F	G	H	kg
SU20-1260	M12	42	53	65	19	60	5	M10	0.13
SU20-1680	M16	45	58	70	24	80	6	M12	0.24

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE

其他類


技術
資料

SU21

磁性千斤頂 MAGNETIC SUPPORT JACK



- 材質：S45C
- 表面：染黑處理

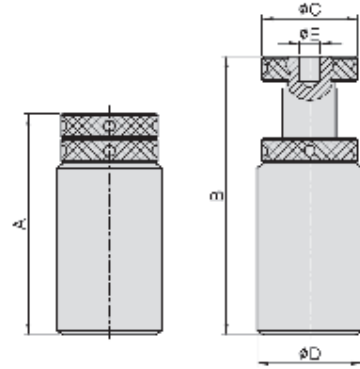


MODEL NO.	A	B	C	D	E	kg	KN
SU21-S050	40	50	35	40	11.5	0.34	72
SU21-S065	50	65	35	40	11.5	0.38	72
SU21-S085	65	85	40	45	11.5	0.50	135
SU21-S110	85	110	40	45	11.5	0.79	135
SU21-S165	110	165	45	50	11.5	1.50	135
SU21-S265	165	265	50	60	11.5	3.00	155
SU21-S300	200	300	50	60	11.5	3.50	155

SU23

大型千斤頂 LARGE SUPPORT JACK



- 材質：S45C
- 表面：染黑處理

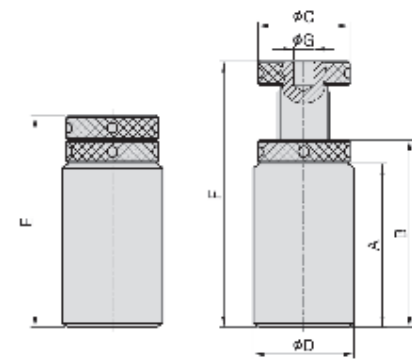


MODEL NO.	A	B	C	D	E	F	G	kg	KN
SU23-S0400	270	285	60	70	300	400	11.5	8.0	260
SU23-S0500	370	385	60	70	400	500	11.5	10.5	260
SU23-S0600	470	485	60	70	500	600	11.5	12.0	260
SU23-S0700	570	585	60	70	600	700	11.5	14.0	260
SU23-S0800	670	685	60	70	700	800	11.5	15.0	260
SU23-S0900	770	785	60	70	800	900	11.5	16.5	260
SU23-S1000	870	885	60	70	900	1000	11.5	18.0	260

SU22

小型千斤頂 SUPPORT JACK



- 材質：S45C
- 表面：染黑處理

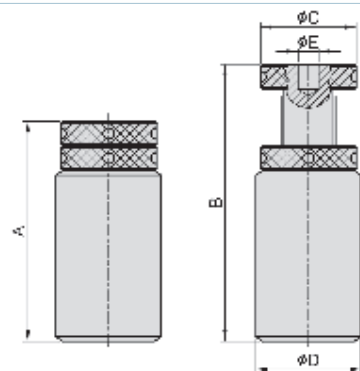



MODEL NO.	A	B	C	D	E	kg	KN
SU22-S050	37	50	35	40	11.5	0.29	72
SU22-S070	50	70	35	40	11.5	0.40	72
SU22-S100	70	100	40	45	11.5	0.72	135
SU22-S150	100	150	45	50	11.5	1.30	135
SU22-S250	150	250	50	60	11.5	2.90	155
SU22-S300	200	300	50	60	11.5	3.50	155

SU24

支持螺桿 KNURLED ADJUSTING SCREW




- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理



MODEL NO.	A	B	C	D	kg
SU24-12060	28	60	8	M12	0.08
SU24-14065	30	65	9	M14	0.10
SU24-16070	30	70	10	M16	0.13
SU24-18080	36	80	12	M18	0.21
SU24-20130	50	130	16	M20	0.47

SU25

級枕 STEP BLOCK



- 材質：S45C
- 表面：染黑處理
- 用途：與 CP25 配合使用

MODEL NO.	調整高度範圍	A	B	C	kg
SU25-25030	19-49	25	29.0	17	0.05
SU25-25045	28-68		45.0	27	0.12
SU25-25097	58-150		97.5	57	0.50
SU25-32059	38-90	32	59.0	35	0.24
SU25-32097	58-150		97.5	57	0.62
SU25-32139	82-210		139.0	81	1.32
SU25-38059	36-90	38	59.0	35	0.29
SU25-38097	58-150		97.5	57	0.73
SU25-38139	82-210		139.0	81	1.60
SU25-50059	36-90	50	59.0	35	0.70
SU25-50097	58-150		97.5	57	1.66
SU25-50139	82-210		139.0	81	3.43



- 材質：S45C
- 硬度：HRC 45°

SU26

平行墊塊 HARDENED GROUND PARALLEL



MODEL NO.	W	H	L	kg
SU26-0812-100	8	12	100	0.18
SU26-0815-100	8	15	100	0.19
SU26-1015-100	10	15	100	0.24
SU26-1020-100	10	20	100	0.32
SU26-1025-100	10	25	100	0.22
SU26-1215-100	12	15	100	0.28
SU26-1220-100	12	20	100	0.19
SU26-1225-100	12	25	100	0.26
SU26-1620-150	16	20	150	0.38
SU26-1625-150	16	25	150	0.48
SU26-1630-150	16	30	150	1.14
SU26-2025-200	20	25	200	1.60
SU26-2030-200	20	30	200	1.92
SU26-2040-200	20	40	200	2.54
SU26-2530-250	25	30	250	3.00
SU26-2540-250	25	40	250	3.95
SU26-2550-250	25	50	250	4.90
SU26-2840-300	28	40	300	5.80
SU26-2850-300	28	50	300	6.66
SU26-3850-300	38	50	300	9.00
SU26-3875-300	38	75	300	13.8

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE

其他類

技術
資料



SU27

基準墊塊

ADJUSTABLE PARALLEL BLOCK



- 材質：S45C
- 用途：可作支持工件用與定位用

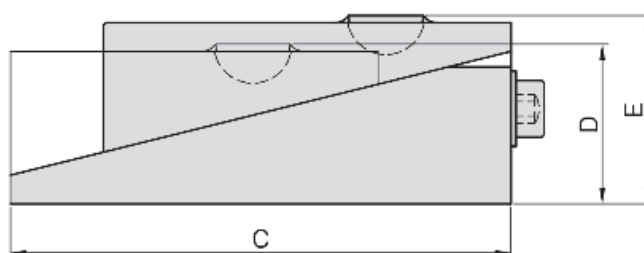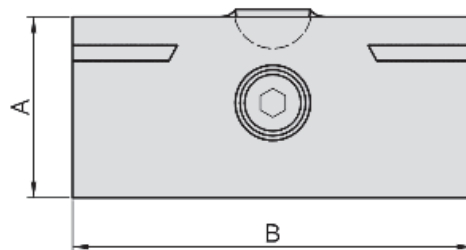


MODEL NO.	A	B	C	D	E	kg
SU27-5039-46	39	50	82	35	41	1.2
SU27-8052-59	53	80	125	49	55	3.4


SU28

T溝墊塊

T SLOT PARALLEL BLOCK

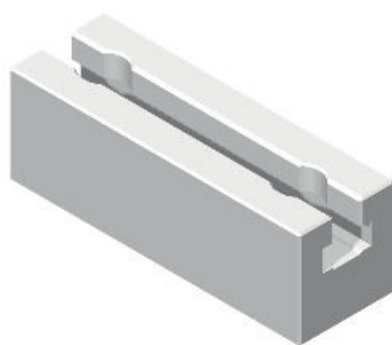

- 材質：SCM420
- 熱處理：HRC 60°
- 表面：染黑處理

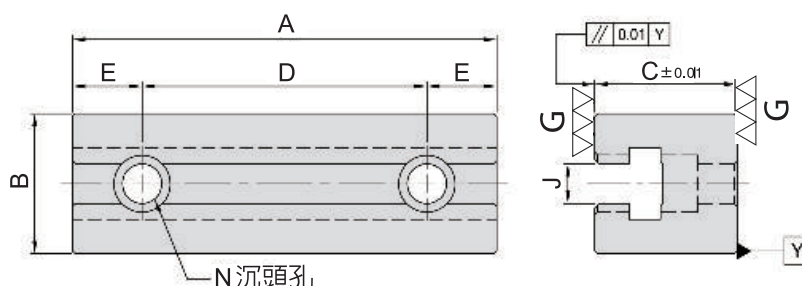

MODEL NO.	A	B	C	D	E	N	J	kg
SU28-5050150-12	149	49	50	100	24.5	M12	14	1.4
SU28-5050200-12	199			150				2.3
SU28-6060150-16	149	59	60	100	24.5	M16	18	2.3
SU28-6060200-16	199			150				3.5