




ATS & ATS-B

Auto Tailstock


Hydraulic or Pneumatic type, It has been designed to complement many of our Non-Lifting Indexing and NC Rotary Tables when heavy and/or long piece parts are being machined. Each model have standard center taper inserted. ATS series attach MT#3. The bigger one of ATS - B series attached MT#4. The ATS models are actuated via hydraulic or Pneumatic source with manual operated valve available to change direction. Standard center height from 110~400mm.



ATS & ATS-B Series / Automatic Tailstock				Suitable model			
Auto Model	Central height A	Central height B	Net weight	TRT	NCT	HC	CT-V
ATS-110	110	157	18		NCT-125		
ATS-135	135	182	19	TRT-100	NCT-170 NCT-200	HC-200	
ATS-155	155	202	20				CT-200V
ATS-170	170	217	21		NCT-250	HC-250	
ATS-190	190	237	25	TRT-170			
ATS-B-210	210	257	34		NCT-320		CT-250V
ATS-B-230	230	277	37	TRT-250		HC-320	CT-320V
ATS-B-250	250	297	39		NCT-400	HC-400	
ATS-B-255	255	302	40	TRT-320			
ATS-B-310	310	357	64		NCT-500	HC-500	
ATS-B-400	400	447	82		NCT-630		

* ATS series center taper MT#3. * ATS-B series center taper MT#4.

ATS

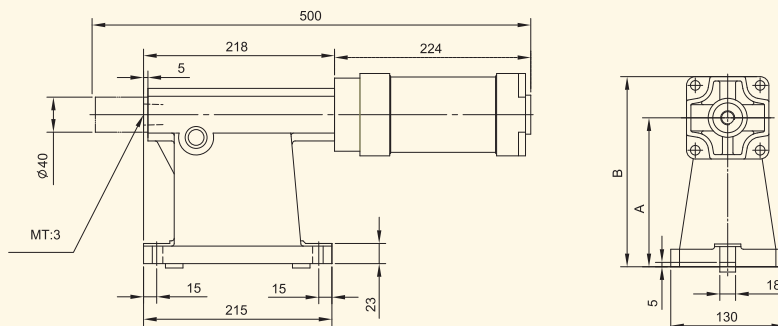

ATS-B

