




夾持類

CP01~CP39

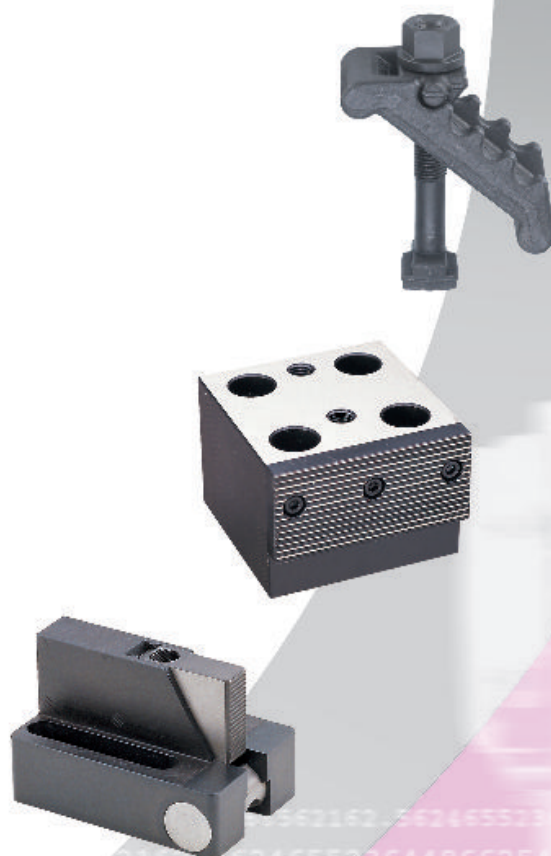



U-CLAMP TAPPED-NOSE STRAP GOOSE NECK TAPPED END U-CLAMP PLANE-CLAMP

CP01

U型壓板 U-CLAMP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 特長：拆裝方便，螺母不需全部脫離

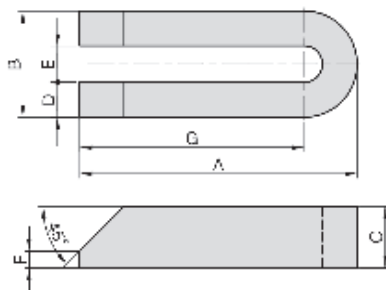



MODEL NO.	A	B	C	D	E	F	G	kg
CP01-12100	100	38	22	12.5	13	6	81	0.41
CP01-12125	125	38	25	12.5	13	6	106	0.58
CP01-16150	150	50	32	16.5	17	8	125	1.10
CP01-16200	200	50	32	16.5	17	8	175	1.40
CP01-16300	300	50	32	16.5	17	8	275	1.55
CP01-20200	200	60	35	19.5	21	10	170	2.10
CP01-20300	300	60	35	19.5	21	10	270	2.70
CP01-24250	250	76	48	25.0	26	18	212	3.55

CP02

圓形壓板 TAPPED-NOSE STRAP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：工件壓緊用
- 特長：施壓點為圓孔，凹處或圓弧狀，最為適用。

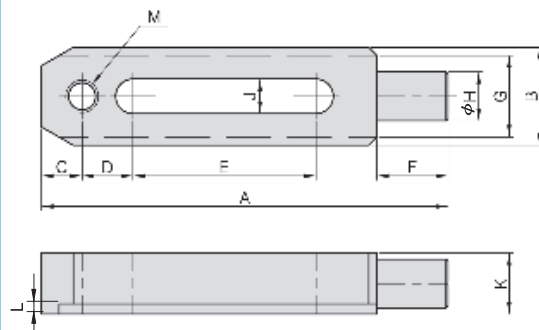



MODEL NO.	A	B	C	D	E	F	G	H	J	K	L	M	Kg
CP02-12150	150	38	15	20	70	25	30	18	13	22	4	M12	0.58
CP02-16150	150	48	20	25	40	35	40	24	17	32	5	M16	1.12
CP02-16200	200	48	20	25	90	35	40	24	17	32	5	M16	1.50
CP02-20200	200	60	30	35	60	40	50	28	21	35	6	M20	2.22
CP02-20250	250	60	30	35	110	40	50	28	21	35	6	M20	2.74

CP03

鳥頸壓板 GOOSE NECK CLAMP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 特長：固定工件時，可降低螺母高度，減少刀具干涉空間。

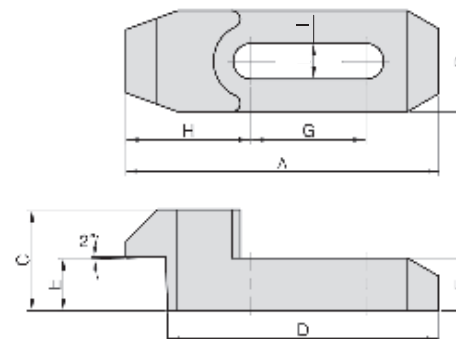


MODEL NO.	A	B	C	D	E	F	G	H	I	kg
CP03-12120	120	36	30	102	16	17	50	45	13	0.49
CP03-16150	150	48	48	130	25	25	55	60	17	1.30
CP03-20175	175	60	60	150	30	30	65	70	21	2.26

CP04

U型壓板 TAPPED END U-CLAMP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：適用一般平面壓緊用
- 特長：拆裝方便，螺母不需要全部脫離

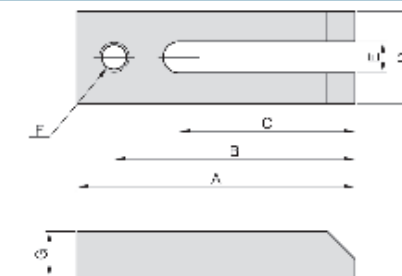



MODEL NO.	A	B	C	D	E	F	G	kg
CP04-12075	75	60	35	38	13	M12	19	0.31
CP04-12100	100	85	60	38	13	M12	25	0.52
CP04-12125	125	110	85	38	13	M12	25	0.64
CP04-14100	100	84	64	38	15	M14	25	0.39
CP04-14150	150	134	89	38	15	M14	25	0.62
CP04-16100	100	80	45	50	17	M16	25	0.73
CP04-16125	125	105	70	50	17	M16	25	0.90
CP04-16150	150	130	95	50	17	M16	25	1.06
CP04-18150	150	130	89	50	19	M18	32	1.05
CP04-18200	200	180	127	50	19	M18	32	1.45
CP04-20150	150	130	95	60	21	M20	32	1.46
CP04-20200	200	180	145	60	21	M20	32	1.85

CP05

標準壓板 DOUBLE ENDED CLAMP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 特長：適用於一般平面壓緊用

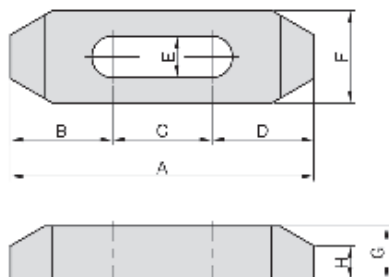



MODEL NO.	A	B	C	D	E	F	G	H	kg
CP05-12065	65	20.0	25	20.0	13	32	19	13	0.22
CP05-12100	100	30.0	40	30.0	13	32	19	13	0.33
CP05-12150	150	49.5	51	49.5	13	32	25	15	0.48
CP05-16080	80	28.0	24	28.0	17	38	22	14	0.34
CP05-16125	125	42.0	41	42.0	17	38	22	14	0.57
CP05-16150	150	51.0	48	51.0	17	38	25	15	0.68
CP05-20100	100	34.0	32	34.0	21	38	22	14	0.41
CP05-20125	125	42.5	40	42.5	21	38	25	15	0.62
CP05-20150	150	51.0	48	51.0	21	38	25	15	0.82
CP05-24150	150	51.0	48	51.0	26	50	32	19	1.14

CP06

單向壓板 TAPPED CLAMP STRAP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：配合 PT29 支持，可作單向壓緊用





MODEL NO.	A	B	C	D	E	F	G	H	kg
CP06-12065	65	32	19	32	14	52	13	M12	0.22
CP06-12080	80	32	19	48	25	69	13	M12	0.27
CP06-12100	100	32	19	60	40	89	13	M12	0.33
CP06-16080	80	38	19	40	17	65	17	M16	0.32
CP06-16100	100	38	25	55	30	85	17	M16	0.53
CP06-16125	125	38	25	70	45	110	17	M16	0.65
CP06-20150	150	50	25	82	50	134	21	M20	1.10
CP06-20200	200	50	32	112	80	184	21	M20	1.90

CP07

定向壓板 SLOTTED END CLAMP STRAP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：可利用溝槽，固定方向。）

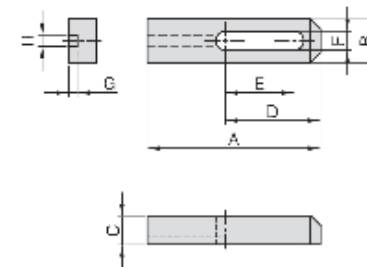


MODEL NO.	A	B	C	D	E	F	G	H	kg
CP07-12065	65	32	22	32	14	13	7	10	0.26
CP07-12080	80	32	22	48	25	13	7	10	0.31
CP07-12100	100	32	22	60	40	13	7	10	0.38
CP07-16080	80	38	22	40	17	17	8	12	0.38
CP07-16100	100	38	25	55	30	17	8	12	0.53
CP07-16125	125	38	25	70	45	17	8	12	0.65
CP07-20150	150	50	25	82	50	21	9	13	1.10
CP07-20200	200	50	32	112	80	21	9	13	1.40

CP08

鉤式夾具 SWING CLAMP



- 材質：SCM-4
- 熱處理：HRC 38°~42°
- 表面：染黑處理
- 用途：固定於基板或基座上，夾持工件之用。）
- 特長：拆裝工件方便，壓板部分可旋轉，上下工件時不受干涉。）

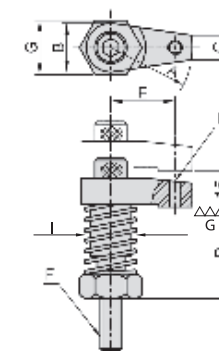



MODEL NO.	A	B	C	D	E	F	G	H	I	kg
CP08-1240-29	30	28	16	40	-	M12	29	-	22	0.29
CP08-1245-36	50	32	20	45	40	M12	36	M12	26	0.50
CP08-1645-36	50	32	20	45	40	M16	36	M12	26	0.50
CP08-1645-41	60	40	25	45	45	M16	41	M16	32	0.75



CP09

鉤式夾具固定桿 SWING CLAMP MOUNT/EXTENSION

- 材質：S45C
- 熱處理：HRC 38°~42°
- 表面：染黑處理
- 特長：於 CP10 配合組成一夾具，固定於基板或基座上，夾持工件之用。

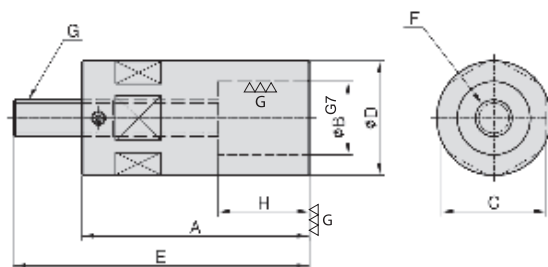


MODEL NO.	A	B	C	D	E	F	G	H	kg
CP09-12080	80	25	36	40	110	M12	M12	40	0.60
CP09-12100	100	25	36	40	130	M12	M12	40	0.78
CP09-16080	80	32	46	50	110	M16	M16	40	0.83
CP09-16100	100	32	46	50	130	M16	M16	40	1.25

CP10

鉤式夾具 SWING CLAMP



- 材質：SCM-4
- 熱處理：HRC 380~420
- 表面：染黑處理
- 用途：與 CP09 組成一夾具，亦可自行擴孔攻牙，自製專用治具使用。)



Type	A	B	C	D
CP10-1022	22	30	20	M10
CP10-1225	25	40	25	M12
CP10-1632	32	40	25	M16


MODEL NO.	A	B	C	D	E	F	G	H	I	J	kg
CP10-1022	30	22	54.5	75	28	16	30	M10	-	-	0.20
CP10-1225	50	25	66.0	87	33	20	40	M12	M12	40	0.35
CP10-1632	60	32	69.5	96	40	26	40	M16	M12	45	0.61



CP11

自由式虎鉗 FREE JAW VISE

- 材質：FCD45
- 用途：可與 CP15 或 CP16 配合
- 特長：夾持範圍不受限制，使用者可自由發揮，大型工件最為適宜

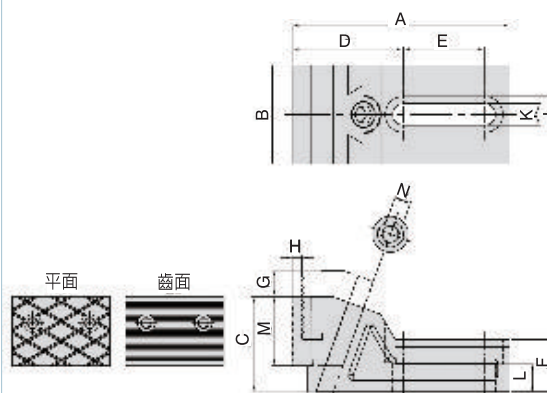



MODEL NO.	A	B	C	D	E	F	G	H	J	K	L	M	N	Type	kg
CP11-1260-G	133	60	58	68	50	32	16	6	22	13	16.8	42	10	平面	2.1
CP11-1685-G	187	85	80	92	70	50	24	9	30	17	23.4	60	14	齒面	5.6
CP11-1260-S	133	60	58	68	50	32	16	6	22	13	16.8	42	10	齒面	2.1
CP11-1685-S	187	85	80	92	70	50	24	9	30	17	23.4	60	14	齒面	5.6



CP12

可調式側面夾具 ADJUSTABLE SIDE CLAMP

- 材質：S45C
- 熱處理：HRC 38°、夾緊面高週波
- 表面：染黑處理
- 用途：小型工件黑皮面或已加工面皆適合夾持

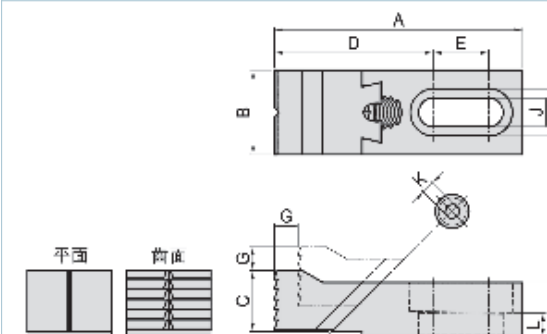


MODEL NO.	A	B	C	D	E	F	G	H	J	K	L	Type	kg
CP12-0825-G	72.0	25	18.0	45.5	16.5	16	7	14	8.5	5	7	平面	0.18
CP12-1235-G	104.5	35	27.5	62.0	30.0	22	12	20	13.5	6	9	平面	0.52
CP12-1640-G	133.0	40	37.5	80.5	35.0	30	14	26	17.0	8	13	平面	1.02
CP12-0825-S	73.5	25	18.0	47.0	16.5	16	7	14	8.5	5	7	齒面	0.18
CP12-1235-S	106.5	35	27.5	64.0	30.0	22	12	20	13.5	6	9	齒面	0.52
CP12-1640-S	134.5	40	37.5	82.0	35.0	30	14	26	17.0	8	13	齒面	1.02

CP13

可調式側面夾具 ADJUSTABLE EDGE CLAMP



- 材質：S45C
- 熱處理：HRC 38°、夾持面高週波
- 表面：染黑處理
- 用途：薄型工件黑皮面或已加工面皆適合夾持

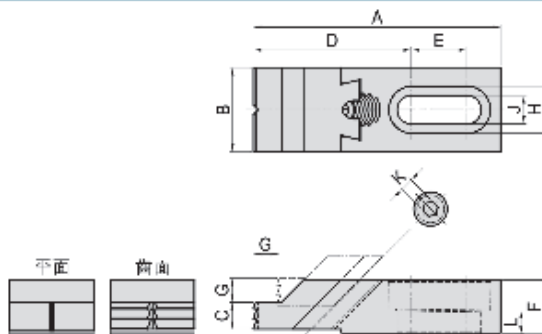

MODEL NO.	A	B	C	D	E	F	G	H	J	K	L	Type	kg
CP13-0825-G	72.0	25	8.5	45.5	16.5	16	7	14	8.5	5	7	平面	0.15
CP13-1235-G	105.0	35	10.5	62.5	30.0	22	12	20	13.5	6	9		0.45
CP13-1640-G	133.0	40	14.0	80.5	35.0	30	14	26	17.0	8	13		0.88
CP13-0825-S	73.5	25	8.5	47.0	16.5	16	7	14	8.5	5	7	齒面	0.15
CP13-1235-S	106.5	35	10.5	64.0	30.0	22	12	20	13.5	6	9		0.45
CP13-1640-S	134.5	40	14.0	82.0	35.0	30	14	26	17.0	8	13		0.88



CP14A



CP14B




CP14C




- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理
- 用途：固定於基板或基座上，適用於各種黑皮面工件之夾持

CP14


鳥型夾具 PIVOTING SIDE CLAMP



MODEL NO.	A	B	C	D	E	F	G	H	I	kg
CP14A-126045	81.5	60	44	49	37	12.5	24	φ13	5-15	0.78
CP14A-169068	121.0	91	68	64	47	18.0	36	φ18	5-15	2.26



MODEL NO.	A	B	C	D	E	F	G	H	kg
CP14B-126045	72.5	60	44	59.5	37	12.5	24	φ13	0.73
CP14B-169068	108.0	91	68	82.0	47	18.0	36	φ18	2.20



MODEL NO.	A	B	C	D	E	F	G	H	kg
CP14C-126045	75	60	44	59.5	37	12.5	24	φ13	0.73
CP14C-169068	110	91	68	82.0	47	18.0	36	φ18	2.12

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE

其他類


技術
資料

CP15

夾具基準面 SERRATED BLOCK STOP



- 材質：本體 S45C，基準面 YK30
- 熱處理：本體 HRC 40°，基準面 HRC 58°
- 表面：染黑處理
- 用途：可與 CP11 配合使用，適合夾持黑皮面之工件。

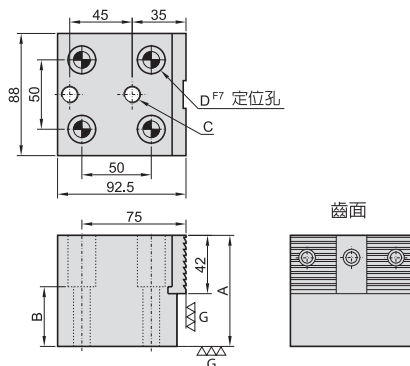



MODEL NO.	A	B	C	D	kg
CP15-1265	65	43	M12	φ12	3.52
CP15-1280	80	58	M12	φ12	4.22
CP15-1665	65	38	M16	φ16	3.24
CP15-1680	80	53	M16	φ16	3.78

CP16

夾具基準面 SMOOTH BLOCK STOP



- 材質：本體 S45C，基準面 YK30
- 熱處理：本體 HRC 40°，基準面 HRC 58°
- 表面：染黑處理
- 用途：可與 CP11 配合使用，適合夾持已加工面之工件。

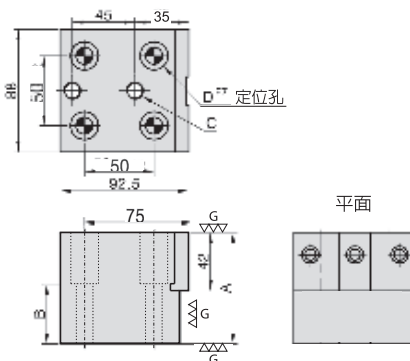


MODEL NO.	A	B	C	D (F7)	kg
CP16-1265	65	43	M12	φ12	3.54
CP16-1280	80	58	M12	φ12	4.22
CP16-1665	65	38	M16	φ16	3.28
CP16-1680	80	53	M16	φ16	3.78

CP19

弓型壓板(含腳座) FORGED SWIVEL CLAMP



- 材質：S45C 鍛造鋼
- 熱處理：HRC 32°~38°
- 表面：染黑處理




MODEL NO.	A	B	C	D	kg
CP19-12125	131	75	46.5	M12-125	1.50
CP19-16150	156	85	55.0	M16-150	2.64
CP19-20194	201	105	62.0	M20-175	4.80

CP20

弓型壓板(不含腳座) FORGED SWIVEL CLAMP



- 材質：S45C 鍛造鋼
- 熱處理：HRC 32°~38°
- 表面：染黑處理




MODEL NO.	A	B	C	D	kg
CP20-12125	125	75	45	M12-125	1.40
CP20-16150	150	85	52	M16-150	2.42
CP20-20194	194	105	58	M20-175	4.50

CP21

齒型壓板 UNIVERSAL CLAMP



- 材質：S45C 鍛造鋼
- 熱處理：HRC 32°~38°
- 表面：染黑處理

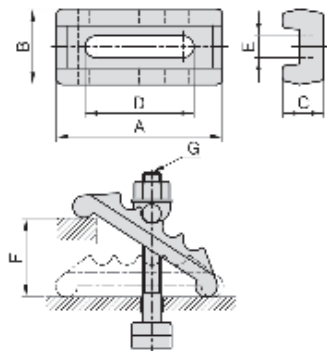


MODEL NO.	A	B	C	D	E	F	G	kg
CP21-12100	100	45	25.5	67.5	13	60	M12	1.10
CP21-16125	125	56	32.5	84.0	18	65	M16	2.10

CP22

T型夾持件 T-SLOT MINIATURE CLAMP



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理

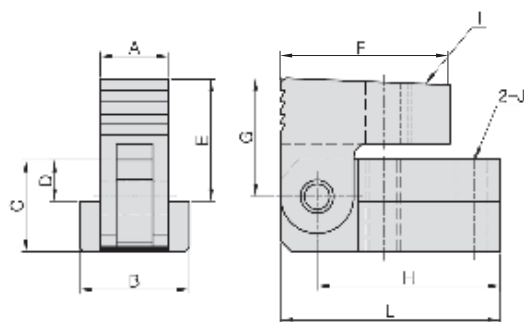


MODEL NO.	A	B	C	D	E	F	G	H	I	L	J	kg
CP22-1218	10.8	17.5	12.7	7.2	23.2	41	22.0	48.0	M 6	54.0	M 6	0.09
CP22-1422	13.8	22.2	15.8	7.1	24.1	41	24.0	46.0	M 6	54.0	M 6	0.15
CP22-1625	15.8	25.4	15.8	7.1	27.1	50	27.0	55.0	M 8	65.0	M 8	0.22
CP22-1828	17.5	28.5	19.0	7.9	28.9	50	29.0	55.0	M 8	65.0	M 8	0.29
CP22-2032	19.7	31.7	25.4	11.4	33.9	50	34.0	55.0	M10	65.0	M10	0.40
CP22-2240	21.7	38.0	28.0	12.8	39.8	65	39.5	71.0	M12	81.5	M12	—
CP22-2841	27.5	46.7	44.0	25.0	49.0	71	49.0	72.5	M12	86.5	M12	0.65
CP22-3559	34.7	55.0	48.0	24.5	64.0	103	62.5	113.5	M16	130.0	M16	—

CP23

自由式虎鉗 FREE VISE



- 材質：本體 FCD45，口金 S45C
- 熱處理：本體燒鈍處理，口金 HRC 32°~36°

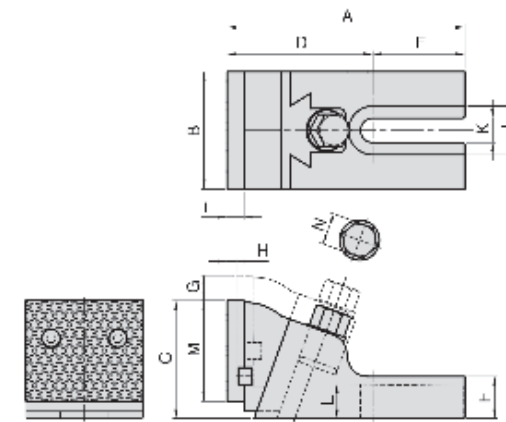


MODEL NO.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	kg
CP23-12140	142	70	70	87	55	25	15	5	10	29	14.5	20.5	60	19	6.3
CP23-16195	192	85	85	103	88	30	20	7	12	37	17.0	24.0	70	24	11.0
CP23-20220	220	110	104	120	100	36	25	9	13	42	21.0	28.0	85	30	21.0

CP24

偏心夾持件 ECCENTRIC CAM LOCK



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理

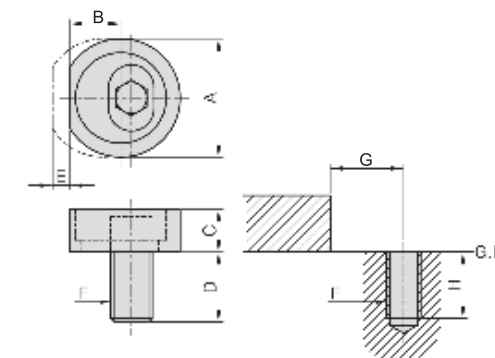


MODEL NO.	A	B	C	D	E	F	G	H	kg
CP24-0824	24	11.0	6	12.8	3	M 8	11.5	17	0.020
CP24-1026	26	11.8	8	14.3	4	M10	12.5	22	0.030
CP24-1230	30	13.5	9	17.8	5	M12	14.5	22	0.050
CP24-1638	38	16.0	12	20.8	6	M16	17.5	26	0.115

CP25

壓板 STEP CLAMP



- 材質：S45C
- 表面：染黑處理
- 熱處理：HRC 32°~38°
- 用途：與 SU25 配合使用

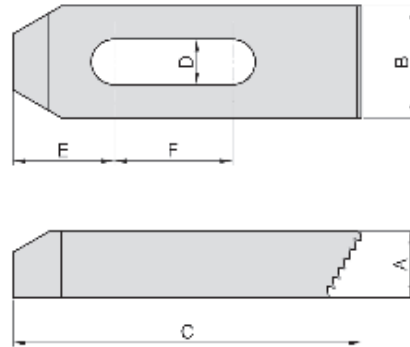


MODEL NO.	A	B	C	D	E	F	kg
CP25-10063	13	25	63	11	18	19	0.100
CP25-10100	16	25	100		27	37	0.215
CP25-10150	19	32	150		30	50	0.570
CP25-12063	13	25	63	13	20	14	0.100
CP25-12100	19	32	100		29	34	0.320
CP25-12150	22	32	150		32	50	0.650
CP25-14063	13	25	63	15	20	14	0.100
CP25-14100	19	32	100		29	34	0.315
CP25-14150	22	32	150		32	50	0.600
CP25-16063	16	32	63	17	22	12	0.160
CP25-16100	19	38	100		31	26	0.400
CP25-16150	22	38	150		40	47	0.710
CP25-18063	16	32	63	20	22	12	0.140
CP25-18100	19	38	100		31	26	0.380
CP25-18150	22	38	150		40	47	0.750
CP25-20100	19	38	100	21	31	26	0.360
CP25-20150	25	38	150		43	44	0.750
CP25-20200	25	50	200		55	65	1.500
CP25-24150	32	50	150	26	43	38	1.290
CP25-24200	32	50	200		53	57	2.000
CP25-24250	38	50	250		60	64	2.950



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理

CP27

鳥形壓板 THREADED GOOSE NECK CLAMP

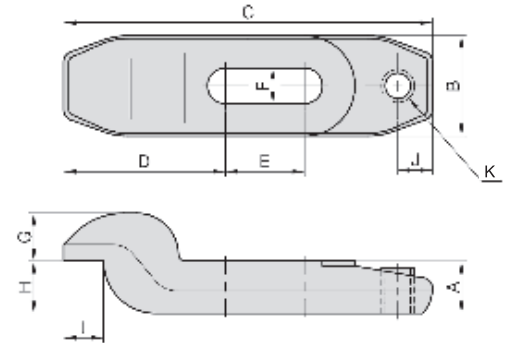


MODEL NO.	A	B	C	D	E	F	G	H	I	J	K	kg
CP27-16100	19	35	100	46.5	7	17	14	21	14	10	M12X1.75	0.78
CP27-16150	22	45	150	62.0	26	17	15	24	22	12	M16 X 2.0	1.70



- 材質：S45C
- 熱處理：HRC 32°~38°
- 表面：染黑處理

CP28

鳥型壓板組 GOOSE NECK CLAMP

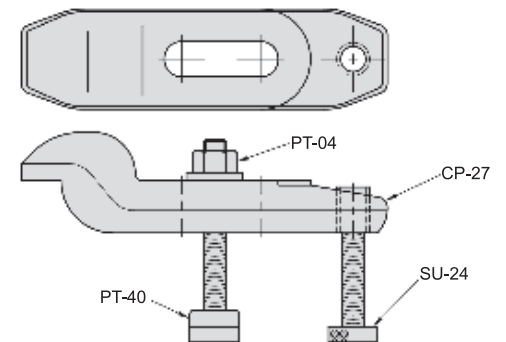


MODEL NO.	CP27	PT40	PT04	SU24	kg
CP28-ZC-40	CP27-16100	PT40-16100	PT04-1624	SU24-12060	1.50
CP28-ZC-60	CP27-16150	PT40-16100	PT04-1624	SU24-16070	2.60

CP29

夾具基準面 BLOCK STOP




- 材質：S45C
- 表面：染黑處理
- 熱處理：HRC 32°~38°
- 用途：可與 CP12 配合使用



MODEL NO.	A	B	C	D	E	F	G	M	N	kg	TYPE
CP29-12100-S	100	35	30	40	30	8	20	12	11	0.59	齒面
CP29-16130-S	130	40	40	50	40	10	26	16	14	1.20	
CP29-12100-G	100	35	30	40	30	8	20	12	11	0.59	平面
CP29-16130-G	130	40	40	50	40	10	26	16	14	1.20	

CP31

夾持座 CLAMPING PARTS

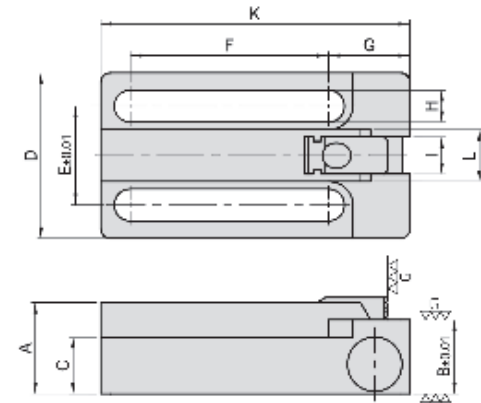


MODEL NO.	A	B	C	D	E	F	G	H	I	K	L	kg
CP31-1240	37	30	23	67	40	80	33.0	13.0	15	125	21	1.36
CP31-1250	37	30	23	77	50	85	33.0	13.0	15	130	21	1.71
CP31-1650	37	30	23	77	50	85	34.5	16.5	15	130	21	1.54

CP30

夾具基準面 THIN BLOCK STOP




- 材質：S45C
- 表面：染黑處理
- 熱處理：HRC 32°~38°
- 用途：可與 CP13 配合使用



MODEL NO.	A	B	C	D	E	F	G	M	N	kg	TYPE
CP30-12100-S	100	35	22	40	30	10	20	12	11	0.46	齒面
CP30-16130-S	130	40	30	50	40	14	26	16	14	0.88	
CP30-12100-G	100	35	22	40	30	10	20	12	11	0.46	平面
CP30-16130-G	130	40	30	50	40	14	26	16	14	0.88	

CP32



基準座 BLOCK STOP

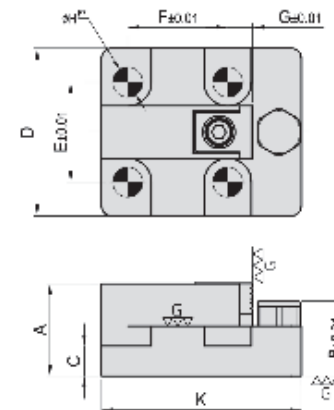

MODEL NO.	A	B	C	D	E	F	G	H	K	kg
CP32-1240	37	30	12	67	40	40	10	12	80	0.86
CP32-1250	37	30	12	77	50	50	10	12	95	1.19
CP32-1650	37	30	15	77	50	50	10	16	95	1.14

CP33


夾持座 CLAMPING PARTS

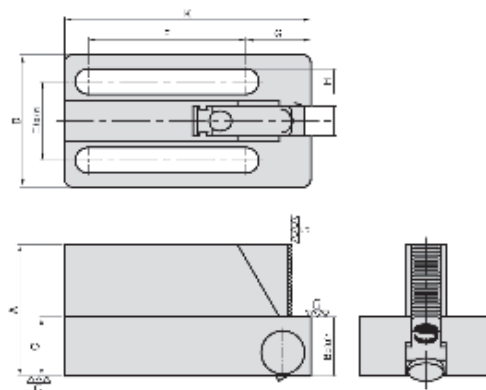

MODEL NO.	A	B	C	D	E	F	G	H	I	K	kg
CP33-1240	67	30	30	67	40	80	33	13	15	125	2.02
CP33-1250	67	30	30	77	50	85	33	13	15	130	2.45
CP33-1650	67	30	30	77	50	85	34.5	16.5	15	130	2.25


CP34

基準座 BLOCK STOP

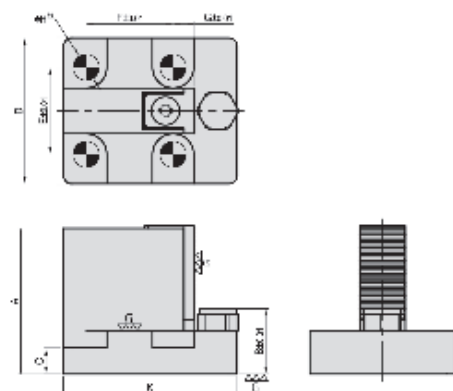

MODEL NO.	A	B	C	D	E	F	G	H	K	kg
CP34-1240	67	30	12	67	40	40	10	12	80	1.24
CP34-1250	67	30	12	77	50	50	10	12	95	1.60
CP34-1650	67	30	15	77	50	50	10	16	95	1.52

CP35A




CP35B




CP35

細齒面基準鉗口 REPLACEMENT HARD-JAW



MODEL NO.	kg
CP35A-2143	0.12

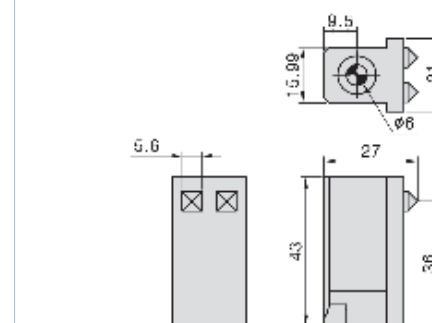

MODEL NO.	kg
CP35B-2143	0.12

BP

BPA

BC

CP

SU

PT

SVF

ALV

OK-
VISE


其他類

技術
資料

CP36


細齒面夾持鉗口 REPLACEMENT HARD-JAW

CP36A




MODEL NO.	kg
CP36A-1243	0.14

CP36B

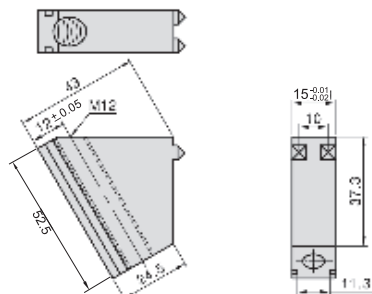

MODEL NO.	kg
CP36B-1243	0.14


CP36C

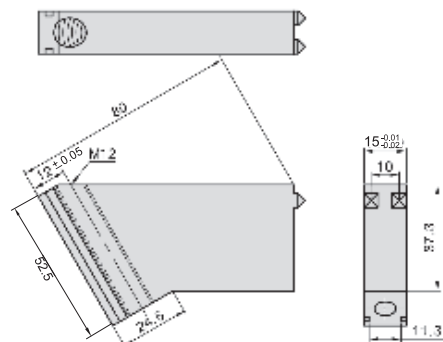

MODEL NO.	kg
CP36C-1280	0.30

CP37

基準定位件 POSITIONING EDGE SUPPORT

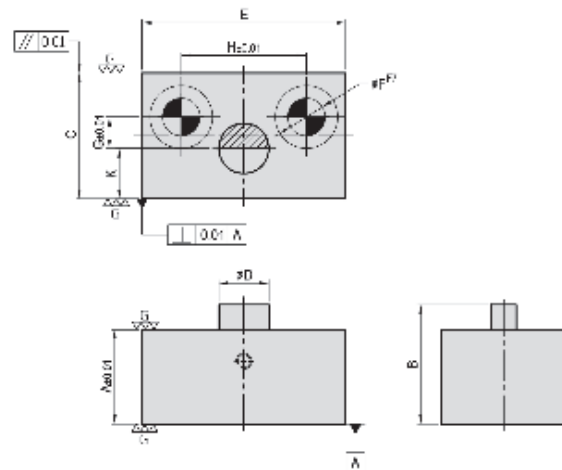

MODEL NO.	A	B		D	E	F	G	H	K	kg
CP37-1240	30	38	40	16	65	12	10	40	16	0.60
CP37-1250	30	38	40	16	75	12	10	50	15	0.60
CP37-1650	30	38	45	16	80	16	10	50	18	0.65

BP

BPA

BC

CP

SU

PT

SVF

ALV


OK-
VISE

其他類



技術
資料

CP38

可調式側面夾具 ADJUSTABLE SIDE CLAMP

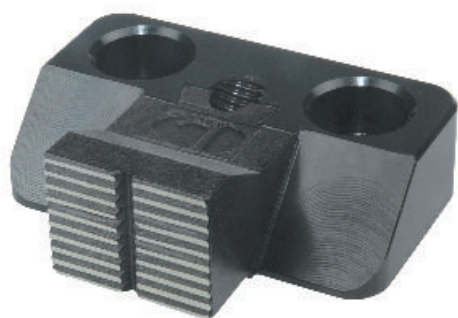

- 材質：S45C
- 熱處理：HRC 38°、夾緊面高週波
- 表面：染黑處理
- 用途：小型工件黑皮面或已加工面皆適合夾持

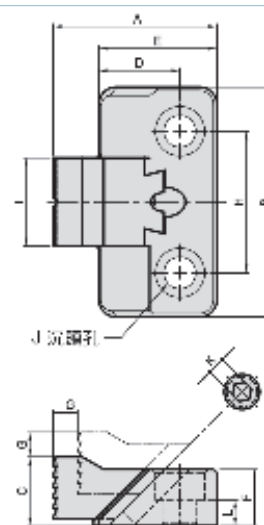



MODEL NO.	A	B	C	D	E	F	G	H	I	J	K	L	Type	kg
CP38-0865-G	45.14	65	19.5	23	33.5	16	7	40	25	M 8	5	7.4	平面	0.22
CP38-1285-G	65.14	85	29.0	33	48.0	22	12	50	35	M12	6	9.0		0.65
CP38-16100-G	85.64	100	39.0	48	68.0	30	14	50	40	M16	8	12.5		1.40
CP38-0865-S	46.45	65	19.5	23	33.5	16	7	40	25	M 8	5	7.4	齒面	0.22
CP38-1285-S	67.14	85	29.0	33	48.0	22	12	50	35	M12	6	9.0		0.65
CP38-16100-S	87.14	100	39.0	48	68.0	30	14	50	40	M16	8	12.5		1.40

CP39

可調式側面夾具 ADJUSTABLE SIDE CLAMP



- 材質：S45C
- 熱處理：HRC 38°、夾緊面高週波
- 表面：染黑處理
- 用途：小型工件黑皮面或已加工面皆適合夾持

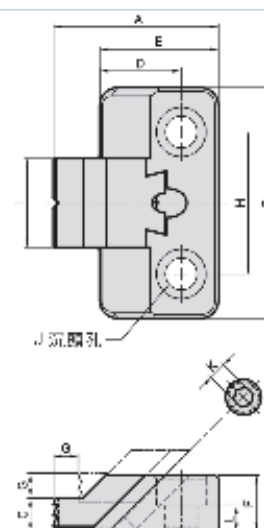

MODEL NO.	A	B	C	D	E	F	G	H	I	J	K	L	Type	kg
CP39-0865-G	45.14	65	9.5	23	33.5	16	7	40	25	M 8	5	7.4	平面	0.2
CP39-1285-G	65.64	85	12.0	33	48.0	22	12	50	35	M12	6	9.0		0.6
CP39-16100-G	86.14	100	15.5	48	68.0	30	14	50	40	M16	8	12.5		1.3
CP39-0865-S	46.55	65	9.5	23	33.5	16	7	40	25	M 8	5	7.4	齒面	0.2
CP39-1285-S	67.14	85	12.0	33	48.0	22	12	50	35	M12	6	9.0		0.6
CP39-16100-S	87.64	100	15.5	48	68.0	30	14	50	40	M16	8	12.5		1.3